

**SANCTUARY BUILDING
FIRST FLOOR RCP - AREA 'B' (ALT.)**

SCALE: 1/8" = 1'-0"

REFLECTED CEILING PLAN LEGEND

- 2x2 MOISTURE RESISTANT ACOUSTICAL CEILING TILE. SEE FINISH SCHEDULE
- 2x2 ACOUSTICAL CEILING GRID. SEE FINISH SCHEDULE
- GYPSUM BOARD CEILING/BULKHEAD
- EXISTING GYP. BD. CEILING, FINISH WITH TEXTURE TO MATCH EXISTING ADJACENT CEILING AND PAINT
- EXISTING CEILING TO REMAIN, NO WORK IN CONTRACT
- 7 1/4" SHIPLAP FIN. WOOD CEILING W/ 1/2" SHADOW GAP (PAINT - COLOR T.B.D. BY ARCHITECT) ALIGN JOINTS TO ADJACENT WALL
- DECORATIVE PENDANT LIGHT FIXTURE
- 2X4 RECESSED LED LIGHT FIXTURE. SEE ELECTRICAL DRAWINGS
- RECESSED LED CAN LIGHT FIXTURE. SEE ELECTRICAL DRAWINGS
- RECESSED LED STRIP LIGHT FIXTURE. SEE ELECTRICAL DRAWINGS
- WALL MOUNT LIGHT FIXTURE. SEE ELECTRICAL DRAWINGS
- EXISTING RECESSED LIGHT FIXTURE TO REMAIN
- DEMO EXISTING RECESSED LIGHT FIXTURE IF NOT LOCATION OF NEW LIGHT PATCH AND PREP FOR NEW FINISH (REFER TO RFS SHEET AG03)
- SUPPLY AIR DIFFUSER. SEE MECHANICAL DRAWINGS
- RETURN AIR GRILLE. SEE MECHANICAL DRAWINGS
- EXISTING MECHANICAL DIFFUSER IN CEILING TO REMAIN
- EXHAUST FAN, REFER TO MECHANICAL DRAWINGS




TYPICAL RCP NOTES

1. INSTALL ACOUSTICAL CEILING AT 9'-0" A.F.F. UNLESS OTHERWISE INDICATED.
2. INSTALL GYP. BD. SOFFITS @ HEIGHTS INDICATED, OR AT BOTTOM OF EXISTING FRAMING.
3. HVAC SUPPLY GRILLES, HVAC RETURN AIR GRILLES, LIGHT FIXTURES, EXHAUST FANS, ETC SHALL BE INSTALLED IN STRICT ACCORDANCE WITH THE ARCHITECTURAL AND ENGINEERING DRAWINGS UNLESS PHYSICALLY IMPOSSIBLE TO INSTALL.
4. G.C. TO NOTIFY ARCHITECT IMMEDIATELY OF ANY DISCREPANCIES OR CONFLICTS DISCOVERED IN THE PLANNED WORK OR EXISTING CONDITIONS.
5. LUMINAIRES & CEILING GRIDS TO BE CENTERED WITHIN ROOMS AND SPACES UNLESS OTHERWISE SHOWN. SHIFT GRID TO ONE SIDE OF ROOM IF CEILING GRID IS 4" OR LESS FROM WALL ON EACH SIDE OF ROOM.
6. PROVIDE & INSTALL ADDITIONAL AC. LAY-IN CEILING GRID 'TS' AS REQUIRED FOR MECHANICAL DIFFUSERS AND GRILL INSTALLATION. SEE MECHANICAL DRAWINGS.
7. ALL INTERIOR CMU WALLS SHALL EXTEND AT LEAST ONE FULL BLOCK COURSE ABOVE CEILING UNLESS OTHERWISE NOTED


REFLECTED CEILING KEYNOTES

1. RECESSED FIRE RATED CURTAIN (MCKEON 'FIREFIGHTER' D2DOOR) REFER TO PLAN AND SECTION DETAILS.
2. SCRAPE EXISTING TEXTURED 'POPCORN' CEILINGS, REFER TO RFS SHEETS, AND PREP FOR NEW FINISH.
3. DEMO EXISTING LIGHT FIXTURE, PATCH (F.V. LOCATIONS AND QUANTITIES)
4. EXISTING HVAC DIFFUSER, REPLACE OR PAINT WHITE (F.V. LOCATIONS)
5. NEW RECESSED LIGHT FIXTURE AT LOCATION OF EXISTING, DEMO AND DISPOSE OF EXISTING FIXTURE, PREP EXISTING OPENING FOR NEW FIXTURE.
6. PATCH, PREP AND PAINT CEILING AT LOCATION OF DEMOLISHED WALLS.

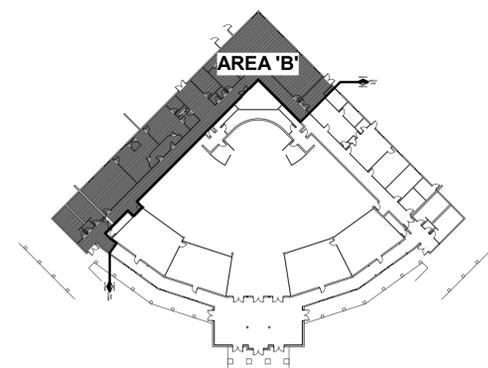

SANCTUARY KEY PLAN

NOT TO SCALE



hostetlerarchitecture

ARCHITECTURE ■ PLANNING

3967 MARKET STREET
WILMINGTON, NC 28403

PHONE: 910.612.1119

www.hostetlerarchitecture.com

CONSULTANTS

RENOVATIONS TO

**GRACE
BAPTIST
CHURCH**

WILMINGTON
NORTH CAROLINA

HOSTETLER ARCHITECTURE
STATE REGISTRATION



ARCHITECT OF RECORD
SHAWN E. HOSTETLER
11926



CONSTRUCTION DOCUMENTS : 02.08.19

REVISIONS		
MARK	DATE	DESCRIPTION
△		
△		
△		
△		

DRAWN BY: _____ PROJ. MGR: _____

SHEET CONTENT

SANCTUARY BUILDING FIRST FLOOR
RCP - AREA 'B' (ALTERNATE)

JOB NO. 18013 SHEET A705