


**\*\*\*Edited For Phase 2 Early Package\*\*\***

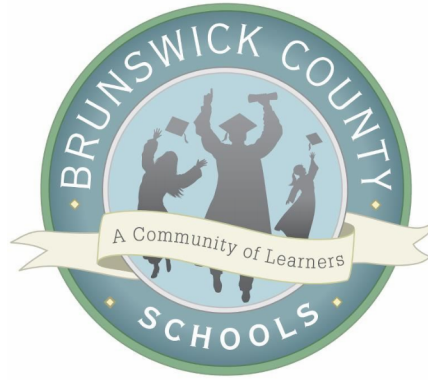

# TOWN CREEK ELEMENTARY SCHOOL ADDITION

6330 LAKE PARK DRIVE SE,  
WINNABOW, NORTH CAROLINA 28479

## Volume 2 PROJECT MANUAL

for

**BRUNSWICK COUNTY SCHOOLS  
NORTH CAROLINA**

Prepared by:



ARCHITECTURE  
ENGINEERING

**ISSUED FOR BIDDING**

~~August 8, 2023~~

~~BMG Project No. 2022264.00~~

**VOLUME 2 OF 2**  
TABLE OF CONTENTS

**DIVISION 00 – BIDDING REQUIREMENTS**

000107 SEALS PAGE

~~**DIVISION 21 – FIRE SUPPRESSION**~~

~~210517 SLEEVES AND SLEEVE SEALS FOR FIRE-SUPPRESSION PIPING~~  
~~210518 ESCUTCHEONS FOR FIRE-SUPPRESSION PIPING~~  
~~210523 GENERAL DUTY VALVES FOR FIRE PROTECTION PIPING~~  
~~210529 HANGERS AND SUPPORTS FOR FIRE SUPPRESSION PIPING AND EQUIPMENT~~  
~~210553 IDENTIFICATION FOR FIRE-SUPPRESSION PIPING AND EQUIPMENT~~  
~~211100 FACILITY FIRE SUPPRESSION WATER SERVICE PIPING~~  
~~211119 FIRE DEPARTMENT CONNECTIONS~~  
~~211313 WET PIPE SPRINKLER SYSTEMS~~

**DIVISION 22 – PLUMBING**

220000 GENERAL PLUMBING  
220513 COMMON MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT  
220517 SLEEVES AND SLEEVE SEALS FOR PLUMBING PIPING  
220518 ESCUTCHEONS FOR PLUMBING PIPING  
220519 METERS AND GAGES FOR PLUMBING PIPING  
220523.12 BALL VALVES FOR PLUMBING PIPING  
220523.14 CHECK VALVES FOR PLUMBING PIPING  
220529 HANGERS AND SUPPORTS FOR PLUMBING PIPING AND EQUIPMENT  
220553 IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT  
220719 PLUMBING PIPING INSULATION  
221116 DOMESTIC WATER PIPING  
221119 DOMESTIC WATER PIPING SPECIALTIES  
221123 DOMESTIC WATER PUMPS  
221316 SANITARY WASTE AND VENT PIPING  
221319 SANITARY WASTE PIPING SPECIALTIES  
221323 SANITARY WASTE INTERCEPTORS  
221413 FACILITY STORM DRAINAGE PIPING  
221423 STORM DRAINAGE PIPING SPECIALTIES  
223300 ELECTRIC, DOMESTIC-WATER HEATERS  
224213.13 COMMERCIAL WATER CLOSETS  
224213.16 COMMERCIAL URINALS  
224216.13 COMMERCIAL LAVATORIES  
224216.16 COMMERCIAL SINKS  
224716 PRESSURE WATER COOLERS

~~**DIVISION 23 – HVAC**~~

<del>230000</del>	<del>GENERAL MECHANICAL</del>
<del>230513</del>	<del>COMMON MOTOR REQUIREMENTS FOR HVAC EQUIPMENT</del>
<del>230516</del>	<del>EXPANSION FITTINGS AND LOOPS FOR HVAC PIPING</del>
<del>230517</del>	<del>SLEEVES AND SLEEVE SEALS FOR HVAC PIPING</del>
<del>230518</del>	<del>ESCUTCHEONS FOR HVAC PIPING</del>
<del>230519</del>	<del>METERS AND GAGES FOR HVAC PIPING</del>
<del>230523.12</del>	<del>BALL VALVES FOR HVAC PIPING</del>
<del>230523.14</del>	<del>CHECK VALVES FOR HVAC PIPING</del>
<del>230529</del>	<del>HANGERS AND SUPPORTS FOR HVAC PIPING AND EQUIPMENT</del>
<del>230548.13</del>	<del>VIBRATION CONTROLS FOR HVAC</del>
<del>230553</del>	<del>IDENTIFICATION FOR HVAC PIPING AND EQUIPMENT</del>
<del>230593</del>	<del>TESTING, ADJUSTING AND BALANCING FOR HVAC</del>
<del>230713</del>	<del>DUCT INSULATION</del>
<del>230719</del>	<del>HVAC PIPING INSULATION</del>
<del>230923</del>	<del>DIRECT DIGITAL CONTROL SYSTEM FOR HVAC</del>
<del>232113</del>	<del>HYDRONIC PIPING</del>
<del>232116</del>	<del>HYDRONIC PIPING SPECIALTIES</del>
<del>232300</del>	<del>REFRIGERANT PIPING</del>
<del>233113</del>	<del>METAL DUCTS</del>
<del>233300</del>	<del>AIR DUCT ACCESSORIES</del>
<del>233423</del>	<del>HVAC POWER VENTILATORS</del>
<del>233713</del>	<del>DIFFUSERS, REGISTERS AND GRILLES</del>
<del>234100</del>	<del>PARTICULATE AIR FILTRATION</del>
<del>238219</del>	<del>FAN COIL UNITS</del>
<del>239119</del>	<del>FIXED LOUVERS</del>

~~**DIVISION 26 – ELECTRICAL**~~

<del>260500</del>	<del>GENERAL ELECTRICAL</del>
<del>260519</del>	<del>BUILDING WIRE AND CABLE</del>
<del>260526</del>	<del>GROUNDING AND BONDING</del>
<del>260529</del>	<del>SUPPORTING DEVICES</del>
<del>260533</del>	<del>RACEWAYS</del>
<del>260534</del>	<del>BOXES</del>
<del>260548.16</del>	<del>SEISMIC CONTROLS FOR ELECTRICAL SYSTEMS</del>
<del>260553</del>	<del>ELECTRICAL IDENTIFICATION</del>
<del>260923</del>	<del>ENCLOSED CONTACTORS</del>
<del>262200</del>	<del>DRY TYPE TRANSFORMERS</del>
<del>262416</del>	<del>PANELBOARDS</del>
<del>262726</del>	<del>WIRING DEVICES</del>
<del>262727</del>	<del>OCCUPANCY SENSORS</del>
<del>262813</del>	<del>FUSES</del>
<del>262816</del>	<del>ENCLOSED SWITCHES</del>
<del>262817</del>	<del>ENCLOSED CIRCUIT BREAKERS</del>
<del>262923</del>	<del>VARIABLE-FREQUENCY MOTOR CONTROLLERS</del>
<del>264313</del>	<del>SURGE PROTECTION DEVICES</del>
<del>265100</del>	<del>INTERIOR LUMINAIRES</del>
<del>265200</del>	<del>EMERGENCY AND EXIT LIGHTING</del>

~~**DIVISION 27 – COMMUNICATIONS**~~

~~270500 EXISTING DATA AND VOICE COMMUNICATION SYSTEM EXTENSIONS~~

~~270510 TELECOMMUNICATIONS PATHWAYS~~

~~270536 CABLE TRAYS FOR COMMUNICATION SYSTEMS~~

~~275116 EXISTING INTERCOM / PUBLIC ADDRESS SYSTEM EXTENSIONS~~

~~**DIVISION 28 – ELECTRONIC SAFETY AND SECURITY**~~

~~281600 INTRUSION DETECTION~~

~~282300 ELECTRONIC VIDEO SURVEILLANCE SYSTEM EXTENSIONS~~

~~283111 EXISTING FIRE DETECTION AND ALARM SYSTEM EXTENSIONS AND NEW~~



~~EMERGENCY VOICE COMMUNICATIONS SYSTEM~~

END OF TABLE OF CONTENTS

**SEALS PAGE**


**Architect**

Becker Morgan Group, Inc.  
3333 Jaeckle Drive, Suite 120  
Wilmington, NC 28403  
(910) 341-7600




**Civil Engineer**

McGill Associates  
712 Village Road SW, Suite 103  
Shallotte, NC 28470  
(910) 755-5872




**Fire Protection  
Mechanical / Plumbing**

CBHF Engineers, PLLC  
2246 Yaupon Drive  
Wilmington, NC 28401  
(910) 791-4000




**Electrical / Fire Alarm Engineer**

CBHF Engineers, PLLC  
2246 Yaupon Drive  
Wilmington, NC 28401  
(910) 791-4000



**Structural Engineer**

Woods Engineering, PA  
254 North Front Street, Suite 201  
Wilmington, NC 28401  
(910) 343-8007



SECTION 220000 - GENERAL PLUMBING

PART 1 - GENERAL

1.1 SCOPE OF WORK

- A. Instructions to Bidders, General Conditions of the Contract, Supplementary General Conditions and Division 01 Specifications Sections bound herewith are a component part of Division 22 specifications. Comply with all provisions, details and instructions of these sections in the accomplishment of work covered under Division 22.
- B. Furnish all labor, materials and equipment and incidentals required to make ready for use complete plumbing systems as shown on the Drawings and specified herein.
- C. Where Sub-Contracts are used to perform portions of the work, division of labor between sub trades is the responsibility of the Contractor.
- D. Furnish all labor, materials and equipment and incidentals required to make ready for use complete plumbing systems as shown on the Drawings and specified herein.
- E. Work includes furnishing, installing and testing the equipment and materials specified in other sections of the Division Specifications and shown on the Plumbing Drawings. It is the intent of these Specifications that the plumbing systems shall be suitable in every way for the intended usage. All material and all work which may be reasonably implied as being incidental to the work of this Division shall be furnished at no extra cost.
- F. The general scope work includes, but is not limited to, furnishing, coordinating, and installing the following.
  - 1. Domestic waste and vent systems with connection to site utilities.
  - 2. Domestic water distribution systems with connection to site utilities.
  - 3. Fuel gas piping with connection to site gas supply.
  - 4. Plumbing fixtures, specialties and equipment.
  - 5. Testing and balancing.
- G. Visit all areas of the existing site, buildings and structures (as applicable) in which work under these sections is to be performed. Inspect carefully the existing conditions prior to bidding. Bid submission is evidence that the Contractor has examined the site and existing conditions, understands conditions under which the work will be performed, and takes full responsibility for complete knowledge of all factors governing the work.
- H. Schedule all service interruptions in existing facilities at the Owner's convenience with 24 hours (minimum) notice. Obtain prior approval for each interruption.
- I. Thoroughly test all plumbing systems after installation and make any minor corrections, changes or adjustments necessary for proper functioning of the systems and equipment. All workmanship shall be of the highest quality; substandard work will be rejected.

## 1.2 SUBMITTALS

- A. Procedures for submittals: Submit under provisions of relevant sections of the General and Supplemental General Conditions and Division 01 Specifications Sections.
- B. Transmit each shop drawing submittal with provided Shop Drawing Submittal Cover Form, attached herewith for each item of equipment/material or each specification section/paragraph.
- C. Clearly indicate proposed equipment and/or materials substitutions in shop drawings. Summarize all deviations from the specified quality, functionality, appearance or performance of proposed equipment and/or materials in the preface of each submittal. Include documentation to support deviations.
- D. Provide descriptive data on all materials and equipment as required to ascertain compliance with Specifications.
- E. Design layout shown on drawings is based on physical sizes of reputable equipment manufacturers. If equipment other than models indicated is installed, any resulting conflicts with space, maintenance access, clearances or codes are the responsibility of the Contractor to correct at his expense.
- F. Where specific models and manufacturers of materials and equipment are specified, substitutions as allowed by the specifications and State law will be considered. Substitutions must be equivalent in quality, function, suitability and arrangement to specified equipment. Architect/Engineer to have final authority as to equivalency of substitutions.
- G. Equipment model numbers noted in these specifications or on the drawings are intended to establish a minimum standard of quality and do not necessarily relate to specific options or arrangement as shown. Provide equipment with all standard features and optional features as stated and arranged as shown on the drawings.

## 1.3 REGULATORY REQUIREMENTS

- A. Perform Work in accordance with all applicable state and local codes, standards and regulations.
- B. Furnish all materials and labor which is be required for compliance with codes, standards and regulations, whether specifically mentioned in these specifications or shown on the drawings.
- C. Obtain required construction permit from the authority having jurisdiction and arrange, at the proper time, for all inspections required by such authority. Pay all permit and inspection costs required.

## 1.4 COORDINATION OF WORK

- A. Contractor is responsible for coordination of work between trades. Provide fully complete and functional systems.
- B. Compare plumbing drawings and specifications with the drawings and specifications for other trades.

- C. Coordinate plumbing installation with the work of other trades. Report any pertinent discrepancies to the Architect/Engineer and obtain written instructions for any necessary revisions. Before starting any construction, make proper provisions to avoid interferences in a manner approved by the Architect/Engineer. No extras will be allowed for rework of uncoordinated installations.
- D. Determine exact route and location of each plumbing item prior to fabrication and/or installation. Adjust location of piping and equipment, etc., to accommodate interferences anticipated and encountered.
- E. Right of Way: General priority for right of way is as follows:
  - 1. Items located per regulatory requirement.
  - 2. Piping with pitch requirement (plumbing drains, etc.).
  - 3. Ductwork.
  - 4. Piping without pitch requirement.
  - 5. Electrical wiring (conduits, etc.).
- F. Arrange all work to permit removal (without damage to other parts) of any equipment requiring periodic replacement.
- G. Provide clearance and easy access to any equipment which requires periodic maintenance. Arrange ducts, piping and equipment to permit ready access to valves, cocks, traps, starters, motors, control components, etc., and to clear the opening of swinging doors and access panels.

#### 1.5 EQUIPMENT AND MATERIALS (GENERAL)

- A. Provide all new materials unless specifically indicated otherwise.
- B. Manufacturers and models listed in drawings and specifications are used for layout and to convey to bidders the general style, type, character and quality of product desired. Listed examples are used only to denote the quality standard of product desired and are not intended to restrict bidders to a specific brand, make, manufacturer or specific name.
- C. Adjust layout, system connections and coordinate with other trades as required to properly install equivalent products.
- D. Where equivalent products are submitted, include all associated costs related to substitution in bid.
- E. Furnish materials bearing the manufacturer's name and trade name. Provide UL label where a UL standard has been established for the particular material.
- F. Furnish standard products of manufacturers regularly engaged in production of equipment types required for the work. Use the manufacturer's latest approved design.
- G. Use the same manufacturer for equipment and materials of the same general type throughout the work to obtain uniform appearance, operation and maintenance.
- H. Protect equipment and materials from dirt, water, chemical or mechanical injury and theft at all times during construction. Provide covers or shelter as required.



- I. If materials or equipment are damaged at any time prior to final acceptance of the work, repair such damage at no additional cost. If materials or equipment are damaged by water, provide replacement no additional cost.
- J. Follow manufacturer's directions completely in the delivery, storage, protection and installation of all equipment and materials. Notify the Architect/Engineer in writing of any conflicts between any requirements of the contract documents and manufacturer's directions. Obtain written instructions before proceeding with the work. The Contractor is responsible for correction of any work that does not comply with the manufacturer's directions or written instructions from the Architect/Engineer at no additional cost.
- K. Repair any damage to factory applied paint finish using touch-up paint furnished by the equipment manufacturer. Repaint entire damaged panel or section per the field painting specifications in Division 09 at no additional cost.

#### 1.6 SEISMIC REQUIREMENTS

- A. Install plumbing work in a manner to be fully compliant with the seismic restraint requirements of the North Carolina State Building Code (NCSBC). The Contractor shall provide any and all seismic restraint details and calculations that may be required by the NCSBC and/or the Authority Having Jurisdiction.
- B. Requirements for restraints are detailed in the NCSBC. All tables and references shall conform to building's location. Restraints shall be per Seismic Performance Category stated on Structural Drawings.
- C. The Contractor shall retain the services of a Professional Engineer registered in the State of North Carolina to design seismic restraint elements required for this project. The Engineer's calculations, bearing his professional seal, shall accompany shop drawings and shall demonstrate Code compliance including certification that the seismic system components comply with the testing requirements of NCSBC. Calculations and shop drawings shall be submitted for review prior to the purchasing of materials, equipment, systems and assemblies. Internal seismic restraint elements of manufactured equipment shall be certified by a professional engineer retained by the manufacturer. Such certificate applies only to internal elements of the equipment. All equipment anchorage requirements shall be coordinated with the building structure and shall be compatible thereto. All such anchorages shall be subject to the review and approval of the project's structural engineer.
- D. The Professional Engineer retained for seismic restraint calculations shall visit the job site upon completion of the seismic restraint installation to comply with the Special Inspections requirement of the Code. This engineer shall provide written verification of compliance of the installation with the approved seismic submittal. This verification shall be submitted as a Special Inspections Report and shall bear the Engineer's professional seal. Job site inspections by other than this engineer are not acceptable.
- E. Review of the seismic design computations and shop drawings by the Architect/Engineer or his agent shall not relieve the Contractor of his responsibility to comply with the seismic or any other requirements of the North Carolina State Building Code.

1.7 OPERATION AND MAINTENANCE MANUALS

- A. Refer to individual plumbing sections and Division 01.

1.8 PAINTING

- A. Protect fixtures, valves, trim, etc. from field painting operations. Do not install escutcheons and trim until painting is complete.

1.9 LOCATIONS AND MEASUREMENTS

- A. Location of plumbing work is shown on the drawings as accurately as possible. Field-verify all measurements to ensure that the work suits the surrounding trim, finishes and/or construction. Provide adjustment as necessary.
- B. Make minor relocations of work prior to installation as required or as directed by the Architect/Engineer at no additional cost.

1.10 SUPERVISION

- A. Contractor to provide an authorized and competent representative to constantly supervise the work from the beginning to completion and final acceptance. Insofar as possible, keep the same foreman and workmen throughout the project duration.
- B. Representatives of Architect/Engineer, Owner, and local inspection authorities will make inspections during the progress of the work. Contractor to accommodate such inspections and correct deficiencies noted.

1.11 QUALITY AND WORKMANSHIP

- A. Contractor to employ skilled tradesmen, laborers and supervisors. Final product to be a neat, well finished, and professional installation.
- B. Remove and replace any work considered substandard quality in the judgment of the Architect/Engineer.

1.12 EXCAVATION, TRENCHING AND BACKFILLING

- A. Provide all excavation, trenching and backfilling as required to complete the work under this Division.
- B. Contractor is responsible for investigating conditions prior to excavating and to exercise care during the excavation to avoid any utilities or other objects which may or may not be shown on the drawings.
- C. Excavate so as not to endanger or damage existing utilities and structures. If damage occurs, repair damage to the satisfaction of the Architect/Engineer at no additional cost.
- D. Lay out location of all ditching at grade and obtain approval from the Architect/Engineer prior excavating.

- E. Remove and dispose of all surplus earth from the site.
- F. Provide suitable backfill materials as required.
- G. Perform excavation, trenching and shoring in accordance with rules and regulations set forth in Article XXI, Bulletin 1 "Trenching" as published in a separate bulletin by the North Carolina Department of Labor, Division of Standards and Inspection Construction Bureau.
- H. Bid excavation work as unclassified with no extra payment for removal of rock, unsuitable soils, etc.

1.13 CLOSING IN WORK

- A. Do not cover up or enclose work until it has been inspected, tested and approved by authorities having jurisdiction over the work. Uncover any such work for inspection and/or test at no additional cost. Restore the work to its original condition after inspection and/or test at no additional cost.

1.14 CUTTING AND PATCHING

- A. Perform all cutting and patching necessary to install work under this Division.
- B. Perform cutting and patching in professional, workmanlike manner.
- C. Arrange work to minimize cutting and patching.
- D. Do not cut joists, beams, girders, columns or any other structural members without written permission from the Architect/Engineer.
- E. Cut opening only large enough to allow easy installation of piping, wiring or ductwork.
- F. Patching material to match material removed.
- G. Restore patched surface to its original appearance at completion of patching.
- H. Where waterproofed surfaces are patched, maintain integrity of waterproofing.
- I. Remove rubble and excess patching materials from the premises.

1.15 INTERPRETATION OF DRAWINGS

- A. Drawings and specifications under this Division are complementary each to the other. Provide any work specified herein and/or indicated on the drawings.
- B. Drawings are diagrammatic and indicate generally the location of fixtures, piping, devices, equipment, etc. Follow drawings as closely as possible, but arrange work to suit the finished surroundings and/or trim.
- C. The words "furnish", "provide", and/or "install" as used in these drawings and specifications are interpreted to include all material and labor necessary to complete the particular item, system, equipment, etc.

- D. Any omissions from either the drawings or specifications are unintentional. Contractor is responsible for notifying the Architect/Engineer of any pertinent omissions before submitting a bid. Complete and working systems are required, whether every small item of material is shown and specified or not.

#### 1.16 ACCESSIBILITY

- A. Locate all equipment which must be serviced, operated, or maintained in fully accessible positions. Equipment to include, but not be limited to, valves, traps, cleanouts, motors, controllers and drain points. If required for accessibility, furnish access doors for this purpose. Minor deviations from drawings may be made to allow for better accessibility.
- B. Coordinate exact locations and size of access panels for each concealed device requiring service.
- C. Access panels: Steel construction with 16-gauge frames and 18-gauge panels, factory primed with rust inhibiting paint, finish paint by Contractor. Provide suitable UL listed doors where installed in rated construction.
- D. Coordinate access panel locations with architectural construction.
- E. Access panels are not required for access to work located above a lift-out "T" bar type ceiling.

#### 1.17 ELECTRICAL WORK IN CONNECTION WITH PLUMBING WORK

- A. Comply with Division 26. Any required Division 22 electrical work not specifically specified to be furnished by Division 26 Contractor shall be provided by Division 22 Contractor.
- B. The plumbing contractors shall furnish all starters and controls for their equipment. The electrical contractor shall mount starters furnished by the plumbing contractor, the electrical contractor provides all safety switches, wiring and connections to line side and load side of starters and safety switches complete to plumbing equipment. For resistance type loads where starters or contactors are not required, the electrical contractor shall provide all power wiring and connections complete to equipment. The plumbing contractors shall provide all control wiring and connections and devices for their equipment.
- C. All electrical work performed Division 22 shall comply with Division 26 specification requirements.
- D. See Division 26 specifications and electrical connection diagrams for division of labor between Divisions 22 and 26.
- E. Coordinate electrical interface of supplied plumbing equipment with electrical system. Division 26 electrical work for plumbing systems is based on values scheduled on plumbing drawings. Division 22 Contractor is responsible for any costs to modify the contracted electrical work to service equipment with electrical characteristics different than those scheduled.

#### 1.18 PLUMBING WORK IN CONNECTION WITH OTHER CONTRACTS

- A. Provide plumbing services as required for items furnished by other contractors or vendors as shown on the plumbing drawings. Include rough-ins and final connections to equipment.

Locations of connections shown on the drawings are approximate and some adjustment of actual connection locations should be anticipated. Coordinate exact connection requirements. Make final connections only after approval of the other contractor or vendor, in the contractor's or vendor's presence.

1. LP Gas System- Provide complete gas piping supply from LP storage tank. Coordinate equipment gas requirements with supplier. Contractor is responsible for contacting LP gas supplier and complying with supplier connection and service piping requirements. Provide all required valves, regulators, accessories as shown on drawings.
2. Site Utilities- In general, work under this Division covers work to five feet outside buildings. Extend and connect work under this Division to site utilities as required.
3. Owner Furnished Equipment- Obtain exact plumbing requirements and rough-in locations for Owner furnished equipment. Provide complete plumbing installation for proper operation of equipment.
4. Laboratory Equipment- Obtaining exact plumbing requirements and rough-in locations for lab fixtures and equipment. Once lab fixtures and equipment installed, PC shall make all final connections for a complete plumbing installation and proper operation of equipment.

#### 1.19 ALTERNATE BIDS

- A. Alternate Bids are described in relevant sections of the General and Supplemental General Conditions and Division 1 Specification Sections.

#### 1.20 PROJECT RECORD DRAWINGS

- A. Submit under provisions of relevant sections of the General and Supplemental General Conditions.
- B. As the work progresses, legibly record all field changes on a set of project contract drawings, herein after called the "record drawings."
- C. Accurately show the installed condition of plumbing work on record drawings.

#### 1.21 PHASING OF THE WORK

- A. Schedule work in accordance with the relevant sections of the General and Supplemental General Conditions and Division 01 Specifications Sections.

#### 1.22 PROJECT CLOSEOUT

- A. Submit under provisions of relevant sections of the General and Supplemental General Conditions and Division 01 Specifications Sections.

PART 2 - PRODUCTS (Not Applicable)

PART 3 - EXECUTION (Not Applicable)

END OF SECTION 220000

SECTION 220513 - COMMON MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes general requirements for single-phase motors installed at equipment manufacturer's factory or shipped separately by equipment manufacturer for field installation.

1.2 COORDINATION

- A. Coordinate features of motors, installed units, and accessory devices to be compatible with the following:
  - 1. Motor controllers.
  - 2. Torque, speed, and horsepower requirements of the load.
  - 3. Ratings and characteristics of supply circuit and required control sequence.
  - 4. Ambient and environmental conditions of installation location.

PART 2 - PRODUCTS

2.1 GENERAL MOTOR REQUIREMENTS

- A. Comply with NEMA MG 1 unless otherwise indicated.

2.2 MOTOR CHARACTERISTICS

- A. Duty: Continuous duty at ambient temperature of 40 deg C and at altitude of 3300 feet above sea level.
- B. Capacity and Torque Characteristics: Sufficient to start, accelerate, and operate connected loads at designated speeds, at installed altitude and environment, with indicated operating sequence, and without exceeding nameplate ratings or considering service factor.

2.3 SINGLE-PHASE MOTORS

- A. Motors larger than 1/20 hp shall be one of the following, to suit starting torque and requirements of specific motor application:
  - 1. Permanent-split capacitor.
  - 2. Split phase.
  - 3. Capacitor start, inductor run.
  - 4. Capacitor start, capacitor run.
- B. Multispeed Motors: Variable-torque, permanent-split-capacitor type.
- C. Bearings: Prelubricated, antifriction ball bearings or sleeve bearings suitable for radial and thrust loading.

- D. Motors 1/20 HP and Smaller: Shaded-pole type.
- E. Thermal Protection: Internal protection to automatically open power supply circuit to motor when winding temperature exceeds a safe value calibrated to temperature rating of motor insulation. Thermal-protection device shall automatically reset when motor temperature returns to normal range.

PART 3 - EXECUTION (Not Applicable)

END OF SECTION 220513



SECTION 220517 - SLEEVES AND SLEEVE SEALS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
  - 1. Sleeves.
  - 2. Sleeve-seal systems.
  - 3. Grout.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 SLEEVES

- A. Galvanized-Steel-Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, zinc coated, with plain ends.

2.2 SLEEVE-SEAL SYSTEMS

- A. Description: Modular sealing-element unit, designed for field assembly, for filling annular space between piping and sleeve.
  - 1. Sealing Elements: EPDM-rubber interlocking links shaped to fit surface of pipe. Include type and number required for pipe material and size of pipe.
  - 2. Pressure Plates: Stainless steel.
  - 3. Connecting Bolts and Nuts: Stainless steel of length required to secure pressure plates to sealing elements.

2.3 GROUT

- A. Standard: ASTM C 1107/C 1107M, Grade B, post-hardening and volume-adjusting, dry, hydraulic-cement grout.
- B. Characteristics: Nonshrink; recommended for interior and exterior applications.
- C. Design Mix: 5000-psi, 28-day compressive strength.
- D. Packaging: Premixed and factory packaged.

### PART 3 - EXECUTION

#### 3.1 SLEEVE INSTALLATION

- A. Install sleeves for piping passing through penetrations in floors, partitions, roofs, and walls.
- B. For sleeves that will have sleeve-seal system installed, select sleeves of size large enough to provide 1-inch annular clear space between piping and concrete slabs and walls.
  - 1. Sleeves are not required for core-drilled holes.
- C. Install sleeves in concrete floors, concrete roof slabs, and concrete walls as new slabs and walls are constructed.
  - 1. Cut sleeves to length for mounting flush with both surfaces.
    - a. Exception: Extend sleeves installed in floors of plumbing equipment areas or other wet areas 2 inches above finished floor level.
  - 2. Using grout, seal the space outside of sleeves in slabs and walls without sleeve-seal system.
- D. Install sleeves for pipes passing through interior partitions.
  - 1. Cut sleeves to length for mounting flush with both surfaces.
  - 2. Install sleeves that are large enough to provide 1/4-inch annular clear space between sleeve and pipe or pipe insulation.
  - 3. Seal annular space between sleeve and piping or piping insulation; use joint sealants appropriate for size, depth, and location of joint. Comply with requirements for sealants specified in Section 079200 "Joint Sealants."
- E. Fire-Barrier Penetrations: Maintain indicated fire rating of walls, partitions, ceilings, and floors at pipe penetrations. Seal pipe penetrations with firestop materials. Comply with requirements for firestopping specified in Section 078413 "Penetration Firestopping."

#### 3.2 SLEEVE-SEAL-SYSTEM INSTALLATION

- A. Install sleeve-seal systems in sleeves in exterior concrete walls and slabs-on-grade at service piping entries into building.
- B. Select type, size, and number of sealing elements required for piping material and size and for sleeve ID or hole size. Position piping in center of sleeve. Center piping in penetration, assemble sleeve-seal system components, and install in annular space between piping and sleeve. Tighten bolts against pressure plates that cause sealing elements to expand and make a watertight seal.

#### 3.3 SLEEVE AND SLEEVE-SEAL SCHEDULE

- A. Use sleeves and sleeve seals for the following piping-penetration applications:
  - 1. Exterior Concrete Walls above Grade:

- a. Galvanized-steel-pipe sleeves.
2. Concrete Slabs-on-Grade:
  - a. Galvanized-steel-pipe sleeves with sleeve-seal system.
    - 1) Select sleeve size to allow for 1-inch annular clear space between piping and sleeve for installing sleeve-seal system.
3. Concrete Slabs above Grade:
  - a. Galvanized-steel-pipe sleeves.
4. Interior Partitions:
  - a. Galvanized-steel-pipe sleeves.

END OF SECTION 230517

SECTION 220518 - ESCUTCHEONS FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Escutcheons.
2. Floor plates.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 ESCUTCHEONS

- A. One-Piece, Cast-Brass Type: With rough-brass finish and setscrew fastener.
- B. One-Piece, Deep-Pattern Type: Deep-drawn, box-shaped brass with chrome-plated finish and spring-clip fasteners.

2.2 FLOOR PLATES

- A. One-Piece Floor Plates: Cast-iron flange with holes for fasteners.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install escutcheons for piping penetrations of walls, ceilings, and finished floors.
- B. Install escutcheons with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.
- C. Install floor plates for piping penetrations of equipment-room floors.
- D. Install floor plates with ID to closely fit around pipe, tube, and insulation of piping and with OD that completely covers opening.

3.2 FIELD QUALITY CONTROL

- A. Replace broken and damaged escutcheons and floor plates using new materials.

END OF SECTION 220518

SECTION 220519 - METERS AND GAGES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Thermometers.
2. Gages.
3. Test plugs.

B. Related Sections:

1. Section 221126 " Facility Liquefied-Petroleum Gas Piping" for gas meters.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product indicated.

B. Wiring Diagrams: For power, signal, and control wiring.

1.3 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each type of meter and gage, from manufacturer.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For meters and gages to include in operation and maintenance manuals.

1.5 SPARE PARTS

A. Provide one spare certified calibrated gauge of each type to be utilized for testing/comparison purposes.

PART 2 - PRODUCTS

2.1 LIGHT-ACTIVATED THERMOMETERS

A. Direct-Mounted, Light-Activated Thermometers:

1. Case: Metal; 7-inch nominal size unless otherwise indicated.
2. Scale(s): Deg F and deg C.
3. Case Form: Adjustable angle.
4. Connector: 1-1/4 inches, with ASME B1.1 screw thread.
5. Stem: Aluminum and of length to suit installation.

- a. Design for Thermowell Installation: Bare stem.

6. Display: Digital.
7. Accuracy: Plus or minus 2 deg F.

## 2.2 THERMOWELLS

### A. Thermowells:

1. Standard: ASME B40.200.
2. Description: Pressure-tight, socket-type fitting made for insertion into piping tee fitting.
3. Material for Use with Copper Tubing: CNR or CUNI.
4. Material for Use with Steel Piping: CRES.
5. Type: Stepped shank unless straight or tapered shank is indicated.
6. External Threads: NPS 1/2, NPS 3/4, or NPS 1, ASME B1.20.1 pipe threads.
7. Internal Threads: 1/2, 3/4, and 1 inch, with ASME B1.1 screw threads.
8. Bore: Diameter required to match thermometer bulb or stem.
9. Insertion Length: Length required to match thermometer bulb or stem.
10. Lagging Extension: Include on thermowells for insulated piping and tubing.
11. Bushings: For converting size of thermowell's internal screw thread to size of thermometer connection.

### B. Heat-Transfer Medium: Mixture of graphite and glycerin.

## 2.3 PRESSURE GAGES

### A. Direct-Mounted, Metal-Case, Dial-Type Pressure Gages:

1. Standard: ASME B40.100.
2. Case: Sealed type(s); cast aluminum or drawn steel; 4-1/2-inch nominal diameter.
3. Pressure-Element Assembly: Bourdon tube unless otherwise indicated.
4. Pressure Connection: Brass, with NPS 1/4 or NPS 1/2, ASME B1.20.1 pipe threads and bottom-outlet type unless back-outlet type is indicated.
5. Movement: Mechanical, with link to pressure element and connection to pointer.
6. Dial: Nonreflective aluminum with permanently etched scale markings graduated in psi and kPa.
7. Pointer: Dark-colored metal.
8. Window: Glass.
9. Ring: Brass.
10. Accuracy: Grade A, plus or minus 1 percent of middle half of scale range.

## 2.4 GAGE ATTACHMENTS

- A. Snubbers: ASME B40.100, brass; with NPS 1/4 or NPS 1/2, ASME B1.20.1 pipe threads and piston-type surge-dampening device. Include extension for use on insulated piping.
- B. Siphons: Loop-shaped section of brass pipe with NPS 1/4 or NPS 1/2 pipe threads.
- C. Valves: Brass or stainless-steel needle, with NPS 1/4 or NPS 1/2, ASME B1.20.1 pipe threads.

## 2.5 TEST PLUGS

- A. Description: Test-station fitting made for insertion into piping tee fitting.

- B. Body: Brass or stainless steel with core inserts and gasketed and threaded cap. Include extended stem on units to be installed in insulated piping.
- C. Thread Size: NPS 1/4 or NPS 1/2, ASME B1.20.1 pipe thread.
- D. Minimum Pressure and Temperature Rating: 500 psig at 200 deg F.
- E. Core Inserts: EPDM self-sealing rubber.

## 2.6 TEST-PLUG KITS

- A. Furnish one test-plug kit(s) containing one thermometer(s), one pressure gage and adapter, and carrying case. Thermometer sensing elements, pressure gage, and adapter probes shall be of diameter to fit test plugs and of length to project into piping.
- B. High-Range Thermometer: Small, bimetallic insertion type with 1- to 2-inch- diameter dial and tapered-end sensing element. Dial range shall be at least 0 to 220 deg F.
- C. Pressure Gage: Small, Bourdon-tube insertion type with 2- to 3-inch- diameter dial and probe. Dial range shall be at least 0 to 200 psig.
- D. Carrying Case: Metal or plastic, with formed instrument padding.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Install thermowells with socket extending to center of pipe and in vertical position in piping tees.
- B. Install thermowells of sizes required to match thermometer connectors. Include bushings if required to match sizes.
- C. Install thermowells with extension on insulated piping.
- D. Fill thermowells with heat-transfer medium.
- E. Install direct-mounted thermometers in thermowells and adjust vertical and tilted positions.
- F. Install direct-mounted pressure gages in piping tees with pressure gage located on pipe at the most readable position.
- G. Install valve and snubber in piping for each pressure gage for fluids (except steam).
- H. Install valve and syphon fitting in piping for each pressure gage for steam.
- I. Install test plugs in piping tees.
- J. Install flow indicators in piping systems in accessible positions for easy viewing.
- K. Install connection fittings in accessible locations for attachment to portable indicators.

- L. Install thermometers in the following locations:
  - 1. Domestic Hot Water Storage Tank.
  - 2. Inlet and outlet of each domestic water heater.
  - 3. Domestic hot water return piping in mechanical room.

- M. Install pressure gages in the following locations:
  - 1. Domestic Water Service Entrance.
  - 2. Inlet and outlet of each domestic water pump.
  - 3. RPZ inlet, RPZ outlet.
  - 4. Natural gas regulator inlet.
  - 5. Natural gas regulator outlet.

### 3.2 CONNECTIONS

- A. Install meters and gages adjacent to machines and equipment to allow service and maintenance of meters, gages, machines, and equipment.

### 3.3 ADJUSTING

- A. After installation, calibrate meters according to manufacturer's written instructions.
- B. Adjust faces of meters and gages to proper angle for best visibility.
- C. Thermometer stems shall be of length to match thermowell insertion length.

### 3.4 THERMOMETER SCALE-RANGE SCHEDULE

- A. Scale Range for Water Piping: 0 to 250 deg F.

### 3.5 PRESSURE-GAGE SCHEDULE

- A. Pressure gages shall be the following:
  - 1. Sealed, direct-mounted, metal case.

### 3.6 PRESSURE-GAGE SCALE-RANGE SCHEDULE

- A. Scale Range Water Piping: 0 to 100 psi.

END OF SECTION 220519



SECTION 220523.12 - BALL VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Bronze ball valves.

1.2 DEFINITIONS

- A. CWP: Cold working pressure.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of valve.

1. Certification that products comply with NSF 61 Annex G.

1.4 DELIVERY, STORAGE, AND HANDLING

A. Prepare valves for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect threads, flange faces, and soldered ends.
3. Set ball valves open to minimize exposure of functional surfaces.

B. Use the following precautions during storage:

1. Maintain valve end protection.
2. Store valves indoors and maintain at higher-than-ambient-dew-point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR VALVES

- A. Source Limitations for Valves: Obtain each type of valve from single source from single manufacturer.

B. ASME Compliance:

1. ASME B1.20.1 for threads for threaded end valves.
2. ASME B16.10 and ASME B16.34 for ferrous valve dimensions and design criteria.
3. ASME B16.18 for solder-joint connections.
4. ASME B31.9 for building services piping valves.

- C. NSF Compliance: NSF 61 Annex G for valve materials for potable-water service.

- D. Bronze valves shall be made with dezincification-resistant materials. Bronze valves made with copper alloy (brass) containing more than 15 percent zinc are not permitted.
- E. Valve Pressure-Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.
- F. Valve Sizes: Same as upstream piping unless otherwise indicated.
- G. Valve Actuator Types:
  - 1. Handlever: For quarter-turn valves.
- H. Valves in Insulated Piping:
  - 1. Include 2-inch stem extensions.
  - 2. Extended operating handles of nonthermal-conductive material and protective sleeves that allow operation of valves without breaking vapor seals or disturbing insulation.
  - 3. Memory stops that are fully adjustable after insulation is applied.

## 2.2 BRONZE BALL VALVES

- A. Two-Piece, Bronze Ball Valves with Full Port and Stainless-Steel Trim:
  - 1. Description:
    - a. Standard: MSS SP-110.
    - b. CWP Rating: 600 psig.
    - c. Body Design: Two piece.
    - d. Body Material: Bronze.
    - e. Ends: Threaded or soldered.
    - f. Seats: PTFE.
    - g. Stem: Stainless steel.
    - h. Ball: Stainless steel, vented.
    - i. Port: Full.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.
- C. Examine threads on valve and mating pipe for form and cleanliness.

- D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.
- E. Do not attempt to repair defective valves; replace with new valves.

### 3.2 VALVE INSTALLATION

- A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- B. Locate valves for easy access and provide separate support where necessary.
- C. Install valves in horizontal piping with stem at or above center of pipe.
- D. Install valves in position to allow full stem movement.
- E. Install valve tags. Comply with requirements in Section 220553 "Identification for Plumbing Piping and Equipment" for valve tags and schedules.

### 3.3 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

- A. If valves with specified CWP ratings are unavailable, the same types of valves with higher CWP ratings may be substituted.
- B. Select valves with the following end connections:
  - 1. For Copper Tubing, NPS 3 and Smaller: Threaded ends except where solder-joint valve-end option is indicated in valve schedules below.

### 3.4 DOMESTIC HOT- AND COLD-WATER VALVE SCHEDULE

- A. Pipe NPS 3 and Smaller:
  - 1. Bronze Valves: May be provided with solder-joint ends instead of threaded ends.
  - 2. Two-piece, bronze ball valves with full port and stainless-steel trim.

END OF SECTION 220523.12

SECTION 220523.14 - CHECK VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Bronze swing check valves.

1.2 DEFINITIONS

- A. CWP: Cold working pressure.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of valve.

1. Certification that products comply with NSF 61 Annex G.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Prepare valves for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect ends.
3. Set check valves in either closed or open position.

- B. Use the following precautions during storage:

1. Maintain valve end protection.
2. Store valves indoors and maintain at higher-than-ambient-dew-point temperature. If outdoor storage is necessary, store valves off the ground in watertight enclosures.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR VALVES

- A. Source Limitations for Valves: Obtain each type of valve from single source from single manufacturer.

- B. ASME Compliance:

1. ASME B1.20.1 for threads for threaded end valves.
2. ASME B16.18 for solder joint.
3. ASME B31.9 for building services piping valves.

- C. NSF Compliance: NSF 61 Annex G for valve materials for potable-water service.

- D. Bronze valves shall be made with dezincification-resistant materials. Bronze valves made with copper alloy (brass) containing more than 15 percent zinc are not permitted.
- E. Valve Pressure-Temperature Ratings: Not less than indicated and as required for system pressures and temperatures.
- F. Valve Sizes: Same as upstream piping unless otherwise indicated.
- G. Valve Bypass and Drain Connections: MSS SP-45.

## 2.2 BRONZE SWING CHECK VALVES

- A. Class 125, Bronze, Swing Check Valves with Bronze Disc:
  - 1. Description:
    - a. Standard: MSS SP-80, Type 3.
    - b. CWP Rating: 200 psig.
    - c. Body Design: Horizontal flow.
    - d. Body Material: ASTM B 62, bronze.
    - e. Ends: Threaded or soldered. See valve schedule articles.
    - f. Disc: Bronze.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Examine valve interior for cleanliness, freedom from foreign matter, and corrosion. Remove special packing materials, such as blocks, used to prevent disc movement during shipping and handling.
- B. Operate valves in positions from fully open to fully closed. Examine guides and seats made accessible by such operations.
- C. Examine threads on valve and mating pipe for form and cleanliness.
- D. Examine mating flange faces for conditions that might cause leakage. Check bolting for proper size, length, and material. Verify that gasket is of proper size, that its material composition is suitable for service, and that it is free from defects and damage.
- E. Do not attempt to repair defective valves; replace with new valves.

### 3.2 VALVE INSTALLATION

- A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.
- B. Locate valves for easy access and provide separate support where necessary.
- C. Install valves in horizontal piping with stem at or above center of pipe.

- D. Install valves in position to allow full stem movement.
- E. Install check valves for proper direction of flow and as follows:
  - 1. Swing Check Valves: In horizontal position with hinge pin level.
  - 2. Lift Check Valves: With stem upright and plumb.
- F. Install valve tags. Comply with requirements in Section 220553 "Identification for Plumbing Piping and Equipment" for valve tags and schedules.

### 3.3 ADJUSTING

- A. Adjust or replace valve packing after piping systems have been tested and put into service but before final adjusting and balancing. Replace valves if persistent leaking occurs.

### 3.4 GENERAL REQUIREMENTS FOR VALVE APPLICATIONS

- A. If valve applications are not indicated, use the following:
  - 1. Pump-Discharge Check Valves:
    - a. NPS 3 and Smaller: Bronze swing check valves with bronze disc.
- B. If valves with specified CWP ratings are unavailable, the same types of valves with higher CWP ratings may be substituted.
- C. End Connections:
  - 1. For Copper Tubing, NPS 3 and Smaller: Threaded or soldered.

### 3.5 DOMESTIC HOT- AND COLD-WATER VALVE SCHEDULE

- A. Pipe NPS 3 and Smaller: Bronze swing check valves, Class 125, bronze disc with soldered or threaded end connections.

END OF SECTION 220523.14

SECTION 220529 - HANGERS AND SUPPORTS FOR PLUMBING PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Metal pipe hangers and supports.
2. Thermal-hanger shield inserts.
3. Fastener systems.
4. Equipment supports.

B. Related Sections:

1. Section 055000 "Metal Fabrications" for structural-steel shapes and plates for trapeze hangers for pipe and equipment supports.

1.2 DEFINITIONS

- A. MSS: Manufacturers Standardization Society of The Valve and Fittings Industry Inc.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

PART 2 - PRODUCTS

2.1 METAL PIPE HANGERS AND SUPPORTS

A. Carbon-Steel Pipe Hangers and Supports:

1. Description: MSS SP-58, Types 1 through 58, factory-fabricated components.
2. Galvanized Metallic Coatings: Pregalvanized or hot dipped.
3. Nonmetallic Coatings: Plastic coating, jacket, or liner.
4. Padded Hangers: Hanger with fiberglass or other pipe insulation pad or cushion to support bearing surface of piping.
5. Hanger Rods: Continuous-thread rod, nuts, and washer made of carbon steel.

B. Copper Pipe Hangers:

1. Description: MSS SP-58, Types 1 through 58, copper-coated-steel, factory-fabricated components.
2. Hanger Rods: Continuous-thread rod, nuts, and washer made of copper-coated steel.

## 2.2 THERMAL-HANGER SHIELD INSERTS

- A. Insulation-Insert Material for Cold Piping: ASTM C 552, Type II cellular glass with 100-psig or ASTM C 591, Type VI, Grade 1 polyisocyanurate with 125-psig minimum compressive strength and vapor barrier.
- B. Insulation-Insert Material for Hot Piping: ASTM C 552, Type II cellular glass with 100-psig or ASTM C 591, Type VI, Grade 1 polyisocyanurate with 125-psig minimum compressive strength.
- C. For Trapeze or Clamped Systems: Insert and shield shall cover entire circumference of pipe.
- D. For Clevis or Band Hangers: Insert and shield shall cover lower 180 degrees of pipe.
- E. Insert Length: Extend 2 inches beyond sheet metal shield for piping operating below ambient air temperature.

## 2.3 FASTENER SYSTEMS

- A. Powder-Actuated Fasteners: Threaded-steel stud, for use in hardened portland cement concrete with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.
- B. Mechanical-Expansion Anchors: Insert-wedge-type, zinc-coated steel anchors, for use in hardened portland cement concrete; with pull-out, tension, and shear capacities appropriate for supported loads and building materials where used.

## 2.4 EQUIPMENT SUPPORTS

- A. Description: Welded, shop- or field-fabricated equipment support made from structural carbon-steel shapes.

## 2.5 MISCELLANEOUS MATERIALS

- A. Structural Steel: ASTM A 36/A 36M, carbon-steel plates, shapes, and bars; black and galvanized.
- B. Grout: ASTM C 1107, factory-mixed and -packaged, dry, hydraulic-cement, nonshrink and nonmetallic grout; suitable for interior and exterior applications.
  - 1. Properties: Nonstaining, noncorrosive, and nongaseous.
  - 2. Design Mix: 5000-psi, 28-day compressive strength.

## PART 3 - EXECUTION

### 3.1 HANGER AND SUPPORT INSTALLATION

- A. Metal Pipe-Hanger Installation: Comply with MSS SP-69 and MSS SP-89. Install hangers, supports, clamps, and attachments as required to properly support piping from the building structure.



- B. Thermal-Hanger Shield Installation: Install in pipe hanger or shield for insulated piping.
- C. Fastener System Installation:
  - 1. Install powder-actuated fasteners for use in lightweight concrete or concrete slabs less than 4 inches thick in concrete after concrete is placed and completely cured. Use operators that are licensed by powder-actuated tool manufacturer. Install fasteners according to powder-actuated tool manufacturer's operating manual.
  - 2. Install mechanical-expansion anchors in concrete after concrete is placed and completely cured. Install fasteners according to manufacturer's written instructions.
- D. Install hangers and supports complete with necessary attachments, inserts, bolts, rods, nuts, washers, and other accessories.
- E. Equipment Support Installation: Fabricate from welded-structural-steel shapes.
- F. Install hangers and supports to allow controlled thermal and seismic movement of piping systems, to permit freedom of movement between pipe anchors, and to facilitate action of expansion joints, expansion loops, expansion bends, and similar units.
- G. Install lateral bracing with pipe hangers and supports to prevent swaying.
- H. Install building attachments within concrete slabs or attach to structural steel. Install additional attachments at concentrated loads, including valves, flanges, and strainers, NPS 2-1/2 and larger and at changes in direction of piping. Install concrete inserts before concrete is placed; fasten inserts to forms and install reinforcing bars through openings at top of inserts.
- I. Load Distribution: Install hangers and supports so that piping live and dead loads and stresses from movement will not be transmitted to connected equipment.
- J. Pipe Slopes: Install hangers and supports to provide indicated pipe slopes and to not exceed maximum pipe deflections allowed by ASME B31.9 for building services piping.
- K. Insulated Piping:
  - 1. Attach clamps and spacers to piping.
    - a. Piping Operating above Ambient Air Temperature: Clamp may project through insulation.
    - b. Piping Operating below Ambient Air Temperature: Use thermal-hanger shield insert with clamp sized to match OD of insert.
    - c. Do not exceed pipe stress limits allowed by ASME B31.9 for building services piping.
  - 2. Install MSS SP-58, Type 39, protection saddles if insulation without vapor barrier is indicated. Fill interior voids with insulation that matches adjoining insulation.
    - a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.

3. Install MSS SP-58, Type 40, protective shields on cold piping with vapor barrier. Shields shall span an arc of 180 degrees.
  - a. Option: Thermal-hanger shield inserts may be used. Include steel weight-distribution plate for pipe NPS 4 and larger if pipe is installed on rollers.
4. Shield Dimensions for Pipe: Not less than the following:
  - a. NPS 1/4 to NPS 3-1/2: 12 inches long and 0.048 inch thick.
  - b. NPS 4: 12 inches long and 0.06 inch thick.
  - c. NPS 5 and NPS 6: 18 inches long and 0.06 inch thick.
  - d. NPS 8 to NPS 14: 24 inches long and 0.075 inch thick.
  - e. NPS 16 to NPS 24: 24 inches long and 0.105 inch thick.
5. Pipes NPS 8 and Larger: Include wood or reinforced calcium-silicate-insulation inserts of length at least as long as protective shield.
6. Thermal-Hanger Shields: Install with insulation same thickness as piping insulation.

### 3.2 EQUIPMENT SUPPORTS

- A. Fabricate structural-steel stands to suspend equipment from structure overhead or to support equipment above floor.
- B. Grouting: Place grout under supports for equipment and make bearing surface smooth.
- C. Provide lateral bracing, to prevent swaying, for equipment supports.

### 3.3 METAL FABRICATIONS

- A. Cut, drill, and fit miscellaneous metal fabrications for trapeze pipe hangers and equipment supports.
- B. Fit exposed connections together to form hairline joints. Field weld connections that cannot be shop welded because of shipping size limitations.
- C. Field Welding: Comply with AWS D1.1/D1.1M procedures for shielded, metal arc welding; appearance and quality of welds; and methods used in correcting welding work; and with the following:
  1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
  2. Obtain fusion without undercut or overlap.
  3. Remove welding flux immediately.
  4. Finish welds at exposed connections so no roughness shows after finishing and so contours of welded surfaces match adjacent contours.

### 3.4 ADJUSTING

- A. Hanger Adjustments: Adjust hangers to distribute loads equally on attachments and to achieve indicated slope of pipe.

- B. Trim excess length of continuous-thread hanger and support rods to 1-1/2 inches.

### 3.5 PAINTING

- A. Touchup: Clean field welds and abraded areas of shop paint. Paint exposed areas immediately after erecting hangers and supports. Use same materials as used for shop painting. Comply with SSPC-PA 1 requirements for touching up field-painted surfaces.
  - 1. Apply paint by brush or spray to provide a minimum dry film thickness of 2.0 mils.
- B. Galvanized Surfaces: Clean welds, bolted connections, and abraded areas and apply galvanizing-repair paint to comply with ASTM A 780.

### 3.6 HANGER AND SUPPORT SCHEDULE

- A. Specific hanger and support requirements are in Sections specifying piping systems and equipment.
- B. Comply with MSS SP-69 for pipe-hanger selections and applications that are not specified in piping system Sections.
- C. Use hangers and supports with galvanized metallic coatings for piping and equipment that will not have field-applied finish.
- D. Use nonmetallic coatings on attachments for electrolytic protection where attachments are in direct contact with copper tubing.
- E. Use carbon-steel pipe hangers and supports and metal trapeze pipe hangers and attachments for general service applications.
- F. Use copper-plated pipe hangers and copper attachments for copper piping and tubing.
- G. Use padded hangers for piping that is subject to scratching.
- H. Use thermal-hanger shield inserts for insulated piping and tubing.
- I. Horizontal-Piping Hangers and Supports: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
  - 1. Adjustable, Steel Clevis Hangers (MSS Type 1): For suspension of noninsulated or insulated, stationary pipes NPS 1/2 to NPS 30.
  - 2. Carbon- or Alloy-Steel, Double-Bolt Pipe Clamps (MSS Type 3): For suspension of pipes NPS 3/4 to NPS 36, requiring clamp flexibility and up to 4 inches of insulation.
  - 3. Steel Pipe Clamps (MSS Type 4): For suspension of cold and hot pipes NPS 1/2 to NPS 24 if little or no insulation is required.
  - 4. Pipe Hangers (MSS Type 5): For suspension of pipes NPS 1/2 to NPS 4, to allow off-center closure for hanger installation before pipe erection.
  - 5. Adjustable, Swivel Split- or Solid-Ring Hangers (MSS Type 6): For suspension of noninsulated, stationary pipes NPS 3/4 to NPS 8.
  - 6. Adjustable, Steel Band Hangers (MSS Type 7): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.

7. Adjustable Band Hangers (MSS Type 9): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.
  8. Adjustable, Swivel-Ring Band Hangers (MSS Type 10): For suspension of noninsulated, stationary pipes NPS 1/2 to NPS 8.
  9. Split Pipe Ring with or without Turnbuckle Hangers (MSS Type 11): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 8.
  10. Extension Hinged or Two-Bolt Split Pipe Clamps (MSS Type 12): For suspension of noninsulated, stationary pipes NPS 3/8 to NPS 3.
  11. U-Bolts (MSS Type 24): For support of heavy pipes NPS 1/2 to NPS 30.
  12. Clips (MSS Type 26): For support of insulated pipes not subject to expansion or contraction.
  13. Adjustable Pipe Saddle Supports (MSS Type 38): For stanchion-type support for pipes NPS 2-1/2 to NPS 36 if vertical adjustment is required, with steel-pipe base stanchion support and cast-iron floor flange.
- J. Vertical-Piping Clamps: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Extension Pipe or Riser Clamps (MSS Type 8): For support of pipe risers NPS 3/4 to NPS 24.
  2. Carbon- or Alloy-Steel Riser Clamps (MSS Type 42): For support of pipe risers NPS 3/4 to NPS 24 if longer ends are required for riser clamps.
- K. Hanger-Rod Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel Turnbuckles (MSS Type 13): For adjustment up to 6 inches for heavy loads.
  2. Steel Clevises (MSS Type 14): For 120 to 450 deg F piping installations.
  3. Swivel Turnbuckles (MSS Type 15): For use with MSS Type 11, split pipe rings.
  4. Malleable-Iron Sockets (MSS Type 16): For attaching hanger rods to various types of building attachments.
  5. Steel Weldless Eye Nuts (MSS Type 17): For 120 to 450 deg F piping installations.
- L. Building Attachments: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel or Malleable Concrete Inserts (MSS Type 18): For upper attachment to suspend pipe hangers from concrete ceiling.
  2. Top-Beam C-Clamps (MSS Type 19): For use under roof installations with bar-joint construction, to attach to top flange of structural shape.
  3. Side-Beam or Channel Clamps (MSS Type 20): For attaching to bottom flange of beams, channels, or angles.
  4. Center-Beam Clamps (MSS Type 21): For attaching to center of bottom flange of beams.
  5. Welded Beam Attachments (MSS Type 22): For attaching to bottom of beams if loads are considerable and rod sizes are large.
  6. C-Clamps (MSS Type 23): For structural shapes.
  7. Top-Beam Clamps (MSS Type 25): For top of beams if hanger rod is required tangent to flange edge.
  8. Side-Beam Clamps (MSS Type 27): For bottom of steel I-beams.
  9. Steel-Beam Clamps with Eye Nuts (MSS Type 28): For attaching to bottom of steel I-beams for heavy loads.

10. Linked-Steel Clamps with Eye Nuts (MSS Type 29): For attaching to bottom of steel I-beams for heavy loads, with link extensions.
  11. Malleable-Beam Clamps with Extension Pieces (MSS Type 30): For attaching to structural steel.
  12. Welded-Steel Brackets: For support of pipes from below or for suspending from above by using clip and rod. Use one of the following for indicated loads:
    - a. Light (MSS Type 31): 750 lb.
    - b. Medium (MSS Type 32): 1500 lb.
    - c. Heavy (MSS Type 33): 3000 lb.
  13. Side-Beam Brackets (MSS Type 34): For sides of steel or wooden beams.
  14. Plate Lugs (MSS Type 57): For attaching to steel beams if flexibility at beam is required.
  15. Horizontal Travelers (MSS Type 58): For supporting piping systems subject to linear horizontal movement where headroom is limited.
- M. Saddles and Shields: Unless otherwise indicated and except as specified in piping system Sections, install the following types:
1. Steel-Pipe-Covering Protection Saddles (MSS Type 39): To fill interior voids with insulation that matches adjoining insulation.
  2. Protection Shields (MSS Type 40): Of length recommended in writing by manufacturer to prevent crushing insulation.
  3. Thermal-Hanger Shield Inserts: For supporting insulated pipe.
- N. Comply with MSS SP-69 for trapeze pipe-hanger selections and applications that are not specified in piping system Sections.
- O. Comply with MFMA-103 for metal framing system selections and applications that are not specified in piping system Sections.
- P. Use powder-actuated fasteners or mechanical-expansion anchors instead of building attachments where required in concrete construction.

END OF SECTION 220529

## SECTION 220553 - IDENTIFICATION FOR PLUMBING PIPING AND EQUIPMENT

### PART 1 - GENERAL

#### 1.1 SUMMARY

A. Section Includes:

1. Equipment labels.
2. Pipe labels.
3. Valve tags.

#### 1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For color, letter style, and graphic representation required for each identification material and device.
- C. Equipment Label Schedule: Include a listing of all equipment to be labeled with the proposed content for each label.
- D. Valve numbering scheme.
- E. Valve Schedules: For each piping system to include in maintenance manuals.

### PART 2 - PRODUCTS

#### 2.1 EQUIPMENT LABELS

A. Plastic Labels for Equipment:

1. Material and Thickness: Multilayer, multicolor, plastic labels for mechanical engraving, 1/16 inch thick, and having predrilled holes for attachment hardware.
2. Letter Color: White.
3. Background Color: Black.
4. Maximum Temperature: Able to withstand temperatures up to 160 deg F.
5. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 by 3/4 inch.
6. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and proportionately larger lettering for greater viewing distances. Include secondary lettering two-thirds to three-quarters the size of principal lettering.
7. Fasteners: Stainless-steel rivets.
8. Adhesive: Contact-type permanent adhesive, compatible with label and with substrate.

B. Label Content: Include equipment's Drawing designation or unique equipment number.

- C. Equipment Label Schedule: For each item of equipment to be labeled, on 8-1/2-by-11-inch bond paper. Tabulate equipment identification number, and identify Drawing numbers where equipment is indicated (plans, details, and schedules) and the Specification Section number and title where equipment is specified. Equipment schedule shall be included in operation and maintenance data.

## 2.2 PIPE LABELS

- A. General Requirements for Manufactured Pipe Labels: Preprinted, color-coded, with lettering indicating service, and showing flow direction.
- B. Pretensioned Pipe Labels: Precoiled, semirigid plastic formed to cover full circumference of pipe and to attach to pipe without fasteners or adhesive.
- C. Self-Adhesive Pipe Labels: Printed plastic with contact-type, permanent-adhesive backing.
- D. Pipe Label Contents: Include identification of piping service using same designations or abbreviations as used on Drawings; also include pipe size and an arrow indicating flow direction.
  - 1. Flow-Direction Arrows: Integral with piping-system service lettering to accommodate both directions or as separate unit on each pipe label to indicate flow direction.
  - 2. Lettering Size: Size letters according to ASME A13.1 for piping.

## 2.3 VALVE TAGS

- A. Valve Tags: Stamped or engraved with 1/4-inch letters for piping system abbreviation and 1/2-inch numbers.
  - 1. Tag Material: Brass, 0.032-inch minimum thickness, and having predrilled or stamped holes for attachment hardware.
  - 2. Fasteners: Brass wire-link chain.
- B. Valve Schedules: For each piping system, on 8-1/2-by-11-inch bond paper. Tabulate valve number, valve size, valve model number, piping system, system abbreviation (as shown on valve tag), location of valve (room or space), normal-operating position (open, closed, or modulating), and variations for identification. Mark valves for emergency shutoff and similar special uses.
  - 1. Valve-tag schedule shall be included in operation and maintenance data.

## PART 3 - EXECUTION

### 3.1 PREPARATION

- A. Clean piping and equipment surfaces of substances that could impair bond of identification devices, including dirt, oil, grease, release agents, and incompatible primers, paints, and encapsulants.

### 3.2 GENERAL INSTALLATION REQUIREMENTS

- A. Coordinate installation of identifying devices with completion of covering and painting of surfaces where devices are to be applied.
- B. Coordinate installation of identifying devices with locations of access panels and doors.
- C. Install identifying devices before installing acoustical ceilings and similar concealment.
- D. For concealed valves, equipment, and devices needing service, provide identification markers visible from floor. Use color dot stickers placed on ceiling grid where valves, equipment, and devices needing service are installed above. Color scheme to be in accordance with Owner's color-coding standard.

### 3.3 EQUIPMENT LABEL INSTALLATION

- A. Install or permanently fasten labels on each major item of mechanical equipment.
- B. Locate equipment labels where accessible and visible.

### 3.4 PIPE LABEL INSTALLATION

- A. Piping Color Coding: Complying with ASME A13.1.
- B. Pipe Label Locations: Locate pipe labels where piping is exposed or above accessible ceilings in finished spaces; machine rooms; accessible maintenance spaces such as shafts, tunnels, and plenums; and exterior exposed locations as follows:
  - 1. Near each valve and control device.
  - 2. Near each branch connection, excluding short takeoffs for fixtures and terminal units. Where flow pattern is not obvious, mark each pipe at branch.
  - 3. Near penetrations through walls, floors, ceilings, and inaccessible enclosures.
  - 4. At access doors, manholes, and similar access points that permit view of concealed piping.
  - 5. Near major equipment items and other points of origination and termination.
  - 6. Spaced at maximum intervals of 50 feet along each run. Reduce intervals to 25 feet in areas of congested piping and equipment.
  - 7. On piping above removable acoustical ceilings. Omit intermediately spaced labels.
- C. Directional Flow Arrows: Arrows shall be used to indicate direction of flow in pipes, including pipes where flow is allowed in both directions.
- D. Identification of Gas Piping:
  - 1. Exposed piping shall be identified by a yellow label marked "Gas" in black letters. The marking shall be spaced at intervals not exceeding 5 feet. All piping and tubing systems greater than 0.5-psi service pressure shall be identified by a yellow label with black letters indicating the piping system pressure. Comply with the latest requirements of the North Carolina Fuel Gas Code.
- E. Pipe Label Color Schedule:



1. Domestic Water Piping
  - a. Background: Complying with ASME A13.1.
  - b. Letter Colors: Complying with ASME A13.1.
2. Sanitary Waste Piping:
  - a. Background Color: Complying with ASME A13.1.
  - b. Letter Color: Complying with ASME A13.1.
3. Storm Drainage Piping:
  - a. Background Color: Complying with ASME A13.1.
  - b. Letter Color: Complying with ASME A13.1.

### 3.5 VALVE-TAG INSTALLATION

- A. Install tags on valves and control devices in piping systems, except check valves, valves within factory-fabricated equipment units, shutoff valves, faucets, convenience and lawn-watering hose connections, and similar roughing-in connections of end-use fixtures and units. List tagged valves in a valve schedule.
- B. Valve-Tag Application Schedule: Tag valves according to size, shape, and color scheme and with captions similar to those indicated in the following subparagraphs:
  1. Valve-Tag Size and Shape:
    - a. Domestic Water: 2 inches, round.
  2. Valve-Tag Colors:
    - a. Domestic Water: Natural.
  3. Letter Colors:
    - a. Domestic Water: White.

END OF SECTION 220553

## SECTION 220719 - PLUMBING PIPING INSULATION

### PART 1 - GENERAL

#### 1.1 SUMMARY

- A. Section includes insulating the following plumbing piping services:
  - 1. Domestic cold-water piping.
  - 2. Domestic hot-water piping.
  - 3. Domestic recirculating hot-water piping.
  - 4. Rainwater leaders
  - 5. Supplies and drains for handicap-accessible lavatories and sinks.

#### 1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include thermal conductivity, water-vapor permeance thickness, and jackets (both factory- and field-applied, if any).

#### 1.3 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Material Test Reports: From a qualified testing agency acceptable to authorities having jurisdiction indicating, interpreting, and certifying test results for compliance of insulation materials, sealers, attachments, cements, and jackets, with requirements indicated. Include dates of tests and test methods employed.
- C. Field quality-control reports.

#### 1.4 QUALITY ASSURANCE

- A. Installer Qualifications: Skilled mechanics who have successfully completed an apprenticeship program or another craft training program certified by the Department of Labor, Bureau of Apprenticeship and Training.
- B. Surface-Burning Characteristics: For insulation and related materials, as determined by testing identical products according to ASTM E 84 by a testing agency acceptable to authorities having jurisdiction. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers, with appropriate markings of applicable testing agency.
  - 1. Insulation Installed Indoors: Flame-spread index of 25 or less, and smoke-developed index of 50 or less.
- C. Comply with the following applicable standards and other requirements specified for miscellaneous components:
  - 1. Supply and Drain Protective Shielding Guards: ICC A117.1.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Packaging: Insulation material containers shall be marked by manufacturer with appropriate ASTM standard designation, type and grade, and maximum use temperature.

1.6 COORDINATION

- A. Coordinate sizes and locations of supports, hangers, and insulation shields specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."
- B. Coordinate clearance requirements with piping Installer for piping insulation application. Before preparing piping Shop Drawings, establish and maintain clearance requirements for installation of insulation and field-applied jackets and finishes and for space required for maintenance.

1.7 SCHEDULING

- A. Schedule insulation application after pressure testing systems and, where required, after installing and testing heat tracing. Insulation application may begin on segments that have satisfactory test results.
- B. Complete installation and concealment of plastic materials as rapidly as possible in each area of construction.

PART 2 - PRODUCTS

2.1 INSULATION MATERIALS

- A. Comply with requirements in "Piping Insulation Schedule, General" and "Indoor Piping Insulation Schedule," articles for where insulating materials shall be applied.
- B. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- C. Products that come in contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871.
- D. Insulation materials for use on austenitic stainless steel shall be qualified as acceptable according to ASTM C 795.
- E. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.
- F. Mineral-Fiber, Preformed Pipe Insulation:
  - 1. Type I, 850 Deg F Materials: Mineral or glass fibers bonded with a thermosetting resin. Comply with ASTM C 547, Type I, Grade A, with factory-applied ASJ-SSL. Factory-applied jacket requirements are specified in "Factory-Applied Jackets" Article.

2.2 INSULATING CEMENTS

- A. Mineral-Fiber Insulating Cement: Comply with ASTM C 195.

### 2.3 ADHESIVES

- A. Materials shall be compatible with insulation materials, jackets, and substrates and for bonding insulation to itself and to surfaces to be insulated, unless otherwise indicated.
- B. Mineral-Fiber Adhesive: Comply with MIL-A-3316C, Class 2, Grade A.
- C. ASJ Adhesive: Comply with MIL-A-3316C, Class 2, Grade A for bonding insulation jacket lap seams and joints.
- D. PVC Jacket Adhesive: Compatible with PVC jacket.

### 2.4 MASTICS

- A. Materials shall be compatible with insulation materials, jackets, and substrates; comply with MIL-PRF-19565C, Type II.
- B. Vapor-Barrier Mastic: Solvent based; suitable for indoor use on below-ambient services.
  - 1. Water-Vapor Permeance: ASTM F 1249, 0.05 perm at 35-mil dry film thickness.
  - 2. Service Temperature Range: 0 to 180 deg F.
  - 3. Solids Content: ASTM D 1644, 44 percent by volume and 62 percent by weight.
  - 4. Color: White.
- C. Breather Mastic: Water based; suitable for indoor and outdoor use on above-ambient services.
  - 1. Water-Vapor Permeance: ASTM F 1249, 1.8 perms at 0.0625-inch dry film thickness.
  - 2. Service Temperature Range: Minus 20 to plus 180 deg F.
  - 3. Solids Content: 60 percent by volume and 66 percent by weight.
  - 4. Color: White.

### 2.5 SEALANTS

- A. Joint Sealants:
  - 1. Materials shall be compatible with insulation materials, jackets, and substrates.
  - 2. Permanently flexible, elastomeric sealant.
  - 3. Service Temperature Range: Minus 100 to plus 300 deg F.
  - 4. Color: White or gray.
- B. ASJ Flashing Sealants:
  - 1. Materials shall be compatible with insulation materials, jackets, and substrates.
  - 2. Fire- and water-resistant, flexible, elastomeric sealant.
  - 3. Service Temperature Range: Minus 40 to plus 250 deg F.
  - 4. Color: White.

### 2.6 FACTORY-APPLIED JACKETS

- A. Insulation system schedules indicate factory-applied jackets on various applications. When factory-applied jackets are indicated, comply with the following:

1. ASJ-SSL: ASJ with self-sealing, pressure-sensitive, acrylic-based adhesive covered by a removable protective strip; complying with ASTM C 1136, Type I.

## 2.7 FIELD-APPLIED JACKETS

- A. Field-applied jackets shall comply with ASTM C 921, Type I, unless otherwise indicated.
- B. PVC Jacket: High-impact-resistant, UV-resistant PVC complying with ASTM D 1784, Class 16354-C; thickness as scheduled; roll stock ready for shop or field cutting and forming. Thickness is indicated in field-applied jacket schedules.
  1. Adhesive: As recommended by jacket material manufacturer.
  2. Color: Color-code jackets based on system. Color as selected by Architect.
  3. Factory-fabricated fitting covers to match jacket if available; otherwise, field fabricate.
    - a. Shapes: 45- and 90-degree, short- and long-radius elbows, tees, valves, flanges, unions, reducers, end caps, soil-pipe hubs, traps, mechanical joints, and P-trap and supply covers for lavatories.

## 2.8 TAPES

- A. ASJ Tape: White vapor-retarder tape matching factory-applied jacket with acrylic adhesive, complying with ASTM C 1136.
  1. Width: 3 inches.
  2. Thickness: 11.5 mils.
  3. Adhesion: 90 ounces force/inch in width.
  4. Elongation: 2 percent.
  5. Tensile Strength: 40 lbf/inch in width.
  6. ASJ Tape Disks and Squares: Precut disks or squares of ASJ tape.
- B. PVC Tape: White vapor-retarder tape matching field-applied PVC jacket with acrylic adhesive; suitable for indoor and outdoor applications.
  1. Width: 2 inches.
  2. Thickness: 6 mils.
  3. Adhesion: 64 ounces force/inch in width.
  4. Elongation: 500 percent.
  5. Tensile Strength: 18 lbf/inch in width.

## 2.9 PROTECTIVE SHIELDING GUARDS

- A. Protective Shielding Pipe Covers:
  1. Description: Manufactured plastic wraps for covering plumbing fixture hot- and cold-water supplies and trap and drain piping. Comply with Americans with Disabilities Act (ADA) requirements.

### PART 3 - EXECUTION

#### 3.1 EXAMINATION

- A. Examine substrates and conditions for compliance with requirements for installation tolerances and other conditions affecting performance of insulation application.
  - 1. Verify that systems to be insulated have been tested and are free of defects.
  - 2. Verify that surfaces to be insulated are clean and dry.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

#### 3.2 PREPARATION

- A. Surface Preparation: Clean and dry surfaces to receive insulation. Remove materials that will adversely affect insulation application.
- B. Surface Preparation: Clean and prepare surfaces to be insulated.

#### 3.3 GENERAL INSTALLATION REQUIREMENTS

- A. Install insulation materials, accessories, and finishes with smooth, straight, and even surfaces; free of voids throughout the length of piping including fittings, valves, and specialties.
- B. Install insulation materials, forms, vapor barriers or retarders, jackets, and thicknesses required for each item of pipe system as specified in insulation system schedules.
- C. Install accessories compatible with insulation materials and suitable for the service. Install accessories that do not corrode, soften, or otherwise attack insulation or jacket in either wet or dry state.
- D. Install insulation with longitudinal seams at top and bottom of horizontal runs.
- E. Install multiple layers of insulation with longitudinal and end seams staggered.
- F. Do not weld brackets, clips, or other attachment devices to piping, fittings, and specialties.
- G. Keep insulation materials dry during application and finishing.
- H. Install insulation with tight longitudinal seams and end joints. Bond seams and joints with adhesive recommended by insulation material manufacturer.
- I. Install insulation with least number of joints practical.
- J. Where vapor barrier is indicated, seal joints, seams, and penetrations in insulation at hangers, supports, anchors, and other projections with vapor-barrier mastic.
  - 1. Install insulation continuously through hangers and around anchor attachments.
  - 2. For insulation application where vapor barriers are indicated, extend insulation on anchor legs from point of attachment to supported item to point of attachment to structure. Taper and seal ends at attachment to structure with vapor-barrier mastic.

3. Install insert materials and install insulation to tightly join the insert. Seal insulation to insulation inserts with adhesive or sealing compound recommended by insulation material manufacturer.
  4. Cover inserts with jacket material matching adjacent pipe insulation. Install shields over jacket, arranged to protect jacket from tear or puncture by hanger, support, and shield.
- K. Apply adhesives, mastics, and sealants at manufacturer's recommended coverage rate and wet and dry film thicknesses.
- L. Install insulation with factory-applied jackets as follows:
1. Draw jacket tight and smooth.
  2. Cover circumferential joints with 3-inch-wide strips, of same material as insulation jacket. Secure strips with adhesive and outward clinching staples along both edges of strip, spaced 4 inches o.c.
  3. Overlap jacket longitudinal seams at least 1-1/2 inches. Install insulation with longitudinal seams at bottom of pipe. Clean and dry surface to receive self-sealing lap. Staple laps with outward clinching staples along edge at 2 inches o.c.
    - a. For below-ambient services, apply vapor-barrier mastic over staples.
  4. Cover joints and seams with tape, according to insulation material manufacturer's written instructions, to maintain vapor seal.
  5. Where vapor barriers are indicated, apply vapor-barrier mastic on seams and joints and at ends adjacent to pipe flanges and fittings.
- M. Cut insulation in a manner to avoid compressing insulation more than 75 percent of its nominal thickness.
- N. Finish installation with systems at operating conditions. Repair joint separations and cracking due to thermal movement.
- O. Repair damaged insulation facings by applying same facing material over damaged areas. Extend patches at least 4 inches beyond damaged areas. Adhere, staple, and seal patches similar to butt joints.
- P. For above-ambient services, do not install insulation to the following:
1. Vibration-control devices.
  2. Testing agency labels and stamps.
  3. Nameplates and data plates.
  4. Cleanouts.

### 3.4 PENETRATIONS

- A. Insulation Installation at Aboveground Exterior Wall Penetrations: Install insulation continuously through wall penetrations.
1. Seal penetrations with flashing sealant.
  2. For applications requiring only indoor insulation, terminate insulation inside wall surface and seal with joint sealant. For applications requiring indoor and outdoor insulation,

- install insulation for outdoor applications tightly joined to indoor insulation ends. Seal joint with joint sealant.
3. Extend jacket of outdoor insulation outside wall flashing and overlap wall flashing at least 2 inches.
  4. Seal jacket to wall flashing with flashing sealant.
- B. Insulation Installation at Interior Wall and Partition Penetrations (That Are Not Fire Rated): Install insulation continuously through walls and partitions.
- C. Insulation Installation at Fire-Rated Wall and Partition Penetrations: Install insulation continuously through penetrations of fire-rated walls and partitions.
1. Comply with requirements in Section 078413 "Penetration Firestopping" for firestopping and fire-resistive joint sealers.
- D. Insulation Installation at Floor Penetrations:
1. Pipe: Install insulation continuously through floor penetrations.
  2. Seal penetrations through fire-rated assemblies. Comply with requirements in Section 078413 "Penetration Firestopping."

### 3.5 GENERAL PIPE INSULATION INSTALLATION

- A. Requirements in this article generally apply to all insulation materials except where more specific requirements are specified in various pipe insulation material installation articles.
- B. Insulation Installation on Fittings, Valves, Strainers, Flanges, and Unions:
1. Install insulation over fittings, valves, strainers, flanges, unions, and other specialties with continuous thermal and vapor-retarder integrity unless otherwise indicated.
  2. Insulate pipe elbows using preformed fitting insulation or mitered fittings made from same material and density as adjacent pipe insulation. Each piece shall be butted tightly against adjoining piece and bonded with adhesive. Fill joints, seams, voids, and irregular surfaces with insulating cement finished to a smooth, hard, and uniform contour that is uniform with adjoining pipe insulation.
  3. Insulate tee fittings with preformed fitting insulation or sectional pipe insulation of same material and thickness as used for adjacent pipe. Cut sectional pipe insulation to fit. Butt each section closely to the next and hold in place with tie wire. Bond pieces with adhesive.
  4. Insulate valves using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. For valves, insulate up to and including the bonnets, valve stuffing-box studs, bolts, and nuts. Fill joints, seams, and irregular surfaces with insulating cement.
  5. Insulate strainers using preformed fitting insulation or sectional pipe insulation of same material, density, and thickness as used for adjacent pipe. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker. Fill joints, seams, and irregular surfaces with insulating cement. Insulate strainers so strainer basket flange or plug can be easily removed and replaced without damaging the insulation and jacket. Provide a removable reusable



- insulation cover. For below-ambient services, provide a design that maintains vapor barrier.
6. Insulate flanges and unions using a section of oversized preformed pipe insulation. Overlap adjoining pipe insulation by not less than two times the thickness of pipe insulation, or one pipe diameter, whichever is thicker.
  7. Cover segmented insulated surfaces with a layer of finishing cement and coat with a mastic. Install vapor-barrier mastic for below-ambient services and a breather mastic for above-ambient services. Reinforce the mastic with fabric-reinforcing mesh. Trowel the mastic to a smooth and well-shaped contour.
  8. For services not specified to receive a field-applied jacket except for flexible elastomeric and polyolefin, install fitted PVC cover over elbows, tees, strainers, valves, flanges, and unions. Terminate ends with PVC end caps. Tape PVC covers to adjoining insulation facing using PVC tape.
  9. Stencil or label the outside insulation jacket of each union with the word "union." Match size and color of pipe labels.
- C. Insulate instrument connections for thermometers, pressure gages, pressure temperature taps, test connections, flow meters, sensors, switches, and transmitters on insulated pipes. Shape insulation at these connections by tapering it to and around the connection with insulating cement and finish with finishing cement, mastic, and flashing sealant.
- D. Install removable insulation covers at locations indicated. Installation shall conform to the following:
1. Make removable flange and union insulation from sectional pipe insulation of same thickness as that on adjoining pipe. Install same insulation jacket as adjoining pipe insulation.
  2. When flange and union covers are made from sectional pipe insulation, extend insulation from flanges or union long at least two times the insulation thickness over adjacent pipe insulation on each side of flange or union. Secure flange cover in place with stainless-steel or aluminum bands. Select band material compatible with insulation and jacket.
  3. Construct removable valve insulation covers in same manner as for flanges, except divide the two-part section on the vertical center line of valve body.
  4. When covers are made from block insulation, make two halves, each consisting of mitered blocks wired to stainless-steel fabric. Secure this wire frame, with its attached insulation, to flanges with tie wire. Extend insulation at least 2 inches over adjacent pipe insulation on each side of valve. Fill space between flange or union cover and pipe insulation with insulating cement. Finish cover assembly with insulating cement applied in two coats. After first coat is dry, apply and trowel second coat to a smooth finish.
  5. Unless a PVC jacket is indicated in field-applied jacket schedules, finish exposed surfaces with a metal jacket.
- 3.6 INSTALLATION OF MINERAL-FIBER INSULATION
- A. Insulation Installation on Straight Pipes and Tubes:
1. Secure each layer of preformed pipe insulation to pipe with wire or bands and tighten bands without deforming insulation materials.
  2. Where vapor barriers are indicated, seal longitudinal seams, end joints, and protrusions with vapor-barrier mastic and joint sealant.

3. For insulation with factory-applied jackets on above-ambient surfaces, secure laps with outward clinched staples at 6 inches o.c.
4. For insulation with factory-applied jackets on below-ambient surfaces, do not staple longitudinal tabs. Instead, secure tabs with additional adhesive as recommended by insulation material manufacturer and seal with vapor-barrier mastic and flashing sealant.

B. Insulation Installation on Pipe Fittings and Elbows:

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed insulation elbows and fittings are not available, install mitered sections of pipe insulation, to a thickness equal to adjoining pipe insulation. Secure insulation materials with wire or bands.

C. Insulation Installation on Valves and Pipe Specialties:

1. Install preformed sections of same material as straight segments of pipe insulation when available.
2. When preformed sections are not available, install mitered sections of pipe insulation to valve body.
3. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
4. Install insulation to flanges as specified for flange insulation application.

3.7 FIELD-APPLIED JACKET INSTALLATION

A. Where glass-cloth jackets are indicated, install directly over bare insulation or insulation with factory-applied jackets.

1. Draw jacket smooth and tight to surface with 2-inch overlap at seams and joints.
2. Embed glass cloth between two 0.062-inch-thick coats of lagging adhesive.
3. Completely encapsulate insulation with coating, leaving no exposed insulation.

B. Where FSK jackets are indicated, install as follows:

1. Draw jacket material smooth and tight.
2. Install lap or joint strips with same material as jacket.
3. Secure jacket to insulation with manufacturer's recommended adhesive.
4. Install jacket with 1-1/2-inch laps at longitudinal seams and 3-inch-wide joint strips at end joints.
5. Seal openings, punctures, and breaks in vapor-retarder jackets and exposed insulation with vapor-barrier mastic.

C. Where PVC jackets are indicated, install with 1-inch overlap at longitudinal seams and end joints. Seal with manufacturers recommended adhesive.

1. Apply two continuous beads of adhesive to seams and joints, one bead under lap and the finish bead along seam and joint edge.

D. Where metal jackets are indicated, install with 2-inch overlap at longitudinal seams and end joints. Overlap longitudinal seams arranged to shed water. Seal end joints with weatherproof

sealant recommended by insulation manufacturer. Secure jacket with stainless-steel bands 12 inches o.c. and at end joints.

### 3.8 FIELD QUALITY CONTROL

- A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.
- B. Perform tests and inspections.
- C. Tests and Inspections:
  - 1. Inspect pipe, fittings, strainers, and valves, randomly selected by Architect, by removing field-applied jacket and insulation in layers in reverse order of their installation. Extent of inspection shall be limited to three locations of straight pipe, three locations of threaded fittings, three locations of welded fittings, two locations of threaded strainers, two locations of welded strainers, three locations of threaded valves, and three locations of flanged valves for each pipe service defined in the "Piping Insulation Schedule, General" Article.
- D. All insulation applications will be considered defective Work if sample inspection reveals noncompliance with requirements.

### 3.9 PIPING INSULATION SCHEDULE, GENERAL

- A. Acceptable preformed pipe and tubular insulation materials and thicknesses are identified for each piping system and pipe size range. If more than one material is listed for a piping system, selection from materials listed is Contractor's option.
- B. Items Not Insulated: Unless otherwise indicated, do not install insulation on the following:
  - 1. Drainage piping located in crawl spaces.
  - 2. Underground piping.
  - 3. Chrome-plated pipes and fittings unless there is a potential for personnel injury.

### 3.10 INDOOR PIPING INSULATION SCHEDULE

- A. Domestic Cold Water:
  - 1. All Pipe Sizes: Insulation shall be the following:
    - a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.
- B. Domestic Hot and Recirculated Hot Water:
  - 1. All Pipe Sizes: Insulation shall be the following:
    - a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.
- C. Exposed Sanitary Drains, Domestic Water, Domestic Hot Water, and Stops for Plumbing Fixtures for People with Disabilities:
  - 1. All Pipe Sizes: Insulation shall be the following:

- a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1/2 inch thick.
  - D. Stormwater and Overflow (horizontal): Insulation shall be the following:
    - 1. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.
  - E. Floor Drains, Traps, and Sanitary Drain Piping within 10 Feet of Drain Receiving Condensate and Equipment Drain Water below 60 Deg F:
    - 1. All Pipe Sizes: Insulation shall be the following:
      - a. Mineral-Fiber, Preformed Pipe Insulation, Type I: 1 inch thick.
- 3.11 INDOOR, FIELD-APPLIED JACKET SCHEDULE
- A. Install jacket over insulation material. For insulation with factory-applied jacket, install the field-applied jacket over the factory-applied jacket.
  - B. If more than one material is listed, selection from materials listed is Contractor's option.
  - C. Piping, Concealed:
    - 1. None.
  - D. Piping, Exposed where subject to damage (from floor to 8' above finished floor):
    - 1. PVC color complying with ASME A13.1: 20 mils thick.

END OF SECTION 220719

## SECTION 221116 - DOMESTIC WATER PIPING

### PART 1 - GENERAL

#### 1.1 SUMMARY

##### A. Section Includes:

1. Under-building-slab and aboveground domestic water pipes, tubes, and fittings inside buildings.
2. Encasement for piping.

#### 1.2 ACTION SUBMITTALS

- ##### A. Product Data: For transition fittings and dielectric fittings.

#### 1.3 INFORMATIONAL SUBMITTALS

- ##### A. System purging and disinfecting activities report.
- ##### B. Field quality-control reports.
- ##### C. Bacteriological and post-chlorination test results.
- ##### D. Water Test Report for Use.

#### 1.4 FIELD CONDITIONS

- ##### A. Interruption of Existing Water Service: Do not interrupt water service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary water service according to requirements indicated:
1. Notify Owner no fewer than two days in advance of proposed interruption of water service.
  2. Do not interrupt water service without Owner's written permission.

### PART 2 - PRODUCTS

#### 2.1 PIPING MATERIALS

- ##### A. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

#### 2.2 COPPER TUBE AND FITTINGS

- ##### A. Hard Copper Tube: ASTM B 88, Type L water tube, drawn temper.
- ##### B. Soft Copper Tube: ASTM B 88, Type L water tube, annealed temper.
- ##### C. Copper Unions:

1. MSS SP-123.
2. Cast-copper-alloy, hexagonal-stock body.
3. Ball-and-socket, metal-to-metal seating surfaces.
4. Solder-joint or threaded ends.

### 2.3 PIPING JOINING MATERIALS

- A. Solder Filler Metals: ASTM B 32, lead-free alloys.
- B. Flux: ASTM B 813, water flushable.

### 2.4 ENCASEMENT FOR PIPING

- A. Standard: ASTM A 674 or AWWA C105/A21.5.
- B. Form: Sheet or tube.
- C. Color: Black or natural.

### 2.5 TRANSITION FITTINGS

- A. General Requirements:
  1. Same size as pipes to be joined.
  2. Pressure rating at least equal to pipes to be joined.
  3. End connections compatible with pipes to be joined.
- B. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.
- C. Sleeve-Type Transition Coupling: AWWA C219.

### 2.6 DIELECTRIC FITTINGS

- A. General Requirements: Assembly of copper alloy and ferrous materials with separating nonconductive insulating material. Include end connections compatible with pipes to be joined.
- B. Dielectric Nipples:
  1. Standard: IAPMO PS 66.
  2. Electroplated steel nipple complying with ASTM F 1545.
  3. Pressure Rating and Temperature: 300 psig at 225 deg F.
  4. End Connections: Male threaded or grooved.
  5. Lining: Inert and noncorrosive, propylene.

## PART 3 - EXECUTION

### 3.1 EARTHWORK

- A. Comply with requirements in Division 33 for excavating, trenching, and backfilling.

### 3.2 PIPING INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of domestic water piping. Indicated locations and arrangements are used to size pipe and calculate friction loss, expansion, and other design considerations. Install piping as indicated unless deviations to layout are approved on coordination drawings.
- B. Install copper tubing under building slab according to CDA's "Copper Tube Handbook."
- C. Install underground copper tube and ductile-iron pipe in PE encasement according to ASTM A 674 or AWWA C105/A21.5.
- D. Install shutoff valve, hose-end drain valve, pressure gage, and test tee with valve inside the building at domestic water-service entrance.
- E. Install shutoff valve immediately upstream of each dielectric fitting.
- F. Install domestic water piping level without pitch and plumb.
- G. Install piping concealed from view and protected from physical contact by building occupants unless otherwise indicated and except in equipment rooms and service areas.
- H. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- I. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal, and coordinate with other services occupying that space.
- J. Install piping to permit valve servicing.
- K. Install nipples, unions, special fittings, and valves with pressure ratings the same as or higher than the system pressure rating used in applications below unless otherwise indicated.
- L. Install piping free of sags and bends.
- M. Install fittings for changes in direction and branch connections.
- N. Install unions in copper tubing at final connection to each piece of equipment, machine, and specialty.
- O. Install pressure gages on suction and discharge piping for each plumbing pump.
- P. Install thermostats in hot-water circulation piping.
- Q. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."
- R. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."

- S. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 220518 "Escutcheons for Plumbing Piping."

### 3.3 JOINT CONSTRUCTION

- A. Ream ends of pipes and tubes and remove burrs.
- B. Remove scale, slag, dirt, and debris from inside and outside of pipes, tubes, and fittings before assembly.
- C. Threaded Joints: Thread pipe with tapered pipe threads according to ASME B1.20.1. Cut threads full and clean using sharp dies. Ream threaded pipe ends to remove burrs and restore full ID. Join pipe fittings and valves as follows:
  - 1. Apply appropriate tape or thread compound to external pipe threads.
  - 2. Damaged Threads: Do not use pipe or pipe fittings with threads that are corroded or damaged.
- D. Brazed Joints for Copper Tubing: Comply with CDA's "Copper Tube Handbook," "Braze Joints" chapter.
- E. Soldered Joints for Copper Tubing: Apply ASTM B 813, water-flushable flux to end of tube. Join copper tube and fittings according to ASTM B 828 or CDA's "Copper Tube Handbook."
- F. Joints for Dissimilar-Material Piping: Make joints using adapters compatible with materials of both piping systems.

### 3.4 TRANSITION FITTING INSTALLATION

- A. Install transition couplings at joints of dissimilar piping.
- B. Transition Fittings in Underground Domestic Water Piping:
  - 1. Fittings for NPS 2 and Larger: Sleeve-type coupling.
- C. Transition Fittings in Aboveground Domestic Water Piping NPS 2 and Smaller: Plastic-to-metal transition fittings or unions.

### 3.5 DIELECTRIC FITTING INSTALLATION

- A. Install dielectric fittings in piping at connections of dissimilar metal piping and tubing.
- B. Dielectric Fittings for NPS 2 and Smaller: Use dielectric couplings or nipples.

### 3.6 HANGER AND SUPPORT INSTALLATION

- A. Comply with requirements for pipe hanger, support products, and installation in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."
  - 1. Vertical Piping: MSS Type 8 or 42, clamps.
  - 2. Individual, Straight, Horizontal Piping Runs:
    - a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.



- b. Longer than 100 Feet: MSS Type 43, adjustable roller hangers.
    - c. Longer than 100 Feet if Indicated: MSS Type 49, spring cushion rolls.
  3. Base of Vertical Piping: MSS Type 52, spring hangers.
- B. Support vertical piping and tubing at base and at each floor.
- C. Rod diameter may be reduced one size for double-rod hangers, to a minimum of 3/8 inch.
- D. Install hangers for copper tubing with the following maximum horizontal spacing and minimum rod diameters:
  1. NPS 3/4 and Smaller: 60 inches with 3/8-inch rod.
  2. NPS 1 and NPS 1-1/4: 72 inches with 3/8-inch rod.
  3. NPS 1-1/2 and NPS 2: 96 inches with 3/8-inch rod.
  4. NPS 2-1/2: 108 inches with 1/2-inch rod.
  5. NPS 3 to NPS 5: 10 feet with 1/2-inch rod.
- E. Install supports for vertical copper tubing every 10 feet.
- F. Support piping and tubing not listed in this article according to MSS SP-69 and manufacturer's written instructions.

### 3.7 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. When installing piping adjacent to equipment and machines, allow space for service and maintenance.
- C. Connect domestic water piping to exterior water-service piping. Use transition fitting to join dissimilar piping materials.
- D. Connect domestic water piping to water-service piping with shutoff valve; extend and connect to the following:
  1. Water Heaters: Cold-water inlet and hot-water outlet piping in sizes indicated, but not smaller than sizes of water heater connections.
  2. Plumbing Fixtures: Cold- and hot-water-supply piping in sizes indicated, but not smaller than that required by plumbing code.
  3. Equipment: Cold- and hot-water-supply piping as indicated, but not smaller than equipment connections. Provide shutoff valve and union for each connection.

### 3.8 IDENTIFICATION

- A. Identify system components. Comply with requirements for identification materials and installation in Section 220553 "Identification for Plumbing Piping and Equipment."
- B. Label pressure piping with system operating pressure.

### 3.9 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:

1. Piping Inspections:
  - a. Do not enclose, cover, or put piping into operation until it has been inspected and approved by authorities having jurisdiction.
  - b. During installation, notify authorities having jurisdiction at least one day before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction:
    - 1) Roughing-in Inspection: Arrange for inspection of piping before concealing or closing in after roughing in and before setting fixtures.
    - 2) Final Inspection: Arrange for authorities having jurisdiction to observe tests specified in "Piping Tests" Subparagraph below and to ensure compliance with requirements.
  - c. Reinspection: If authorities having jurisdiction find that piping will not pass tests or inspections, make required corrections and arrange for reinspection.
  - d. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
2. Piping Tests:
  - a. Fill domestic water piping. Check components to determine that they are not air bound and that piping is full of water.
  - b. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit a separate report for each test, complete with diagram of portion of piping tested.
  - c. Leave new, altered, extended, or replaced domestic water piping uncovered and unconcealed until it has been tested and approved. Expose work that was covered or concealed before it was tested.
  - d. Cap and subject piping to static water pressure of 50 psig above operating pressure, without exceeding pressure rating of piping system materials. Isolate test source and allow it to stand for four hours. Leaks and loss in test pressure constitute defects that must be repaired.
  - e. Repair leaks and defects with new materials, and retest piping or portion thereof until satisfactory results are obtained.
  - f. Prepare reports for tests and for corrective action required.

B. Domestic water piping will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

### 3.10 ADJUSTING

- A. Perform the following adjustments before operation:
  1. Close drain valves, hydrants, and hose bibbs.
  2. Open shutoff valves to fully open position.
  3. Open throttling valves to proper setting.
  4. Adjust balancing valves in hot-water-circulation return piping to provide adequate flow.
    - a. Manually adjust ball-type balancing valves in hot-water-circulation return piping to provide hot-water flow in each branch.
    - b. Adjust calibrated balancing valves to flows indicated.

5. Remove plugs used during testing of piping and for temporary sealing of piping during installation.
6. Remove and clean strainer screens. Close drain valves and replace drain plugs.
7. Check plumbing specialties and verify proper settings, adjustments, and operation.

### 3.11 CLEANING

- A. Clean and disinfect potable domestic water piping as follows:
  1. Purge new piping and parts of existing piping that have been altered, extended, or repaired before using.
  2. Use purging and disinfecting procedures prescribed by authorities having jurisdiction; if methods are not prescribed, use procedures described in either AWWA C651 or AWWA C652 or follow procedures described below:
    - a. Flush piping system with clean, potable water until dirty water does not appear at outlets.
    - b. Fill and isolate system according to either of the following:
      - 1) Fill system or part thereof with water/chlorine solution with at least 50 ppm of chlorine. Isolate with valves and allow to stand for 24 hours.
      - 2) Fill system or part thereof with water/chlorine solution with at least 200 ppm of chlorine. Isolate and allow to stand for three hours.
    - c. Flush system with clean, potable water until no chlorine is in water coming from system after the standing time.
    - d. Repeat procedures if biological examination shows contamination.
    - e. Submit water samples in sterile bottles to authorities having jurisdiction.
- B. Prepare and submit reports of purging and disinfecting activities. Include copies of water-sample approvals from authorities having jurisdiction.
- C. Clean interior of domestic water piping system. Remove dirt and debris as work progresses.
- D. Water supply shall not be placed into service until bacteriological test results of representative water samples analyzed by an Owner approved laboratory are found to be satisfactory. Contractor shall hire an independent laboratory to conduct bacteriological and post-chlorination test certifying that the water meets EPA quality of the drinking water. The "Water Test Report for Use," after accepted by the Engineer of Records, is required to be submitted to SCO prior sending request for Final Inspection and Occupancy Permit.

### 3.12 PIPING SCHEDULE

- A. Transition and special fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.
- B. Under-building-slab, domestic water, building-service piping, NPS 3 and smaller, shall be the following:
  1. Soft copper tube, ASTM B 88, Type L; wrought-copper, solder-joint fittings; and brazed joints.
- C. Aboveground domestic water piping, NPS 3 and smaller, shall be the following:

1. Hard copper tube, ASTM B 88, Type L; wrought-copper, solder-joint fittings; and soldered joints.

### 3.13 VALVE SCHEDULE

- A. Drawings indicate valve types to be used. Where specific valve types are not indicated, the following requirements apply:
  1. Shutoff Duty: Use ball valves for piping NPS 2 and smaller. Use butterfly or ball valves with flanged ends for piping NPS 2-1/2 and larger.
  2. Throttling Duty: Use ball valves for piping NPS 2 and smaller. Use butterfly or ball valves with flanged ends for piping NPS 2-1/2 and larger.
  3. Hot-Water Circulation Piping, Balancing Duty: Calibrated balancing valves.
  4. Drain Duty: Hose-end drain valves.
- B. Use check valves to maintain correct direction of domestic water flow to and from equipment.

END OF SECTION 221116

SECTION 221119 - DOMESTIC WATER PIPING SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
  - 1. Backflow preventers.
  - 2. Balancing valves.
  - 3. Temperature-actuated, water mixing valves.
  - 4. Outlet boxes.
  - 5. Hose bibbs.
  - 6. Wall hydrants.
  - 7. Drain valves.
  - 8. Water-hammer arresters.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For domestic water piping specialties to include in emergency, operation, and maintenance manuals.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS FOR PIPING SPECIALTIES

- A. Potable-water piping and components shall comply with NSF 61 Annex G and NSF 14.

2.2 PERFORMANCE REQUIREMENTS

- A. Minimum Working Pressure for Domestic Water Piping Specialties: 125 psig unless otherwise indicated.

2.3 BACKFLOW PREVENTERS

- A. Reduced-Pressure-Principle Backflow Preventers:

1. Refer to Plumbing Fixture Schedule on design drawings.
2. Standard: ASSE 1013.
3. Operation: Continuous-pressure applications.

B. Plumbing Equipment Backflow Preventers:

1. Standard: ASSE 1022.
2. Operation: Continuous-pressure applications.
3. Size: NPS 1/4 or NPS 3/8.
4. Body: Stainless steel.
5. End Connections: Threaded.

2.4 BALANCING VALVES

A. Copper-Alloy Calibrated Balancing Valves:

1. Type: Ball valve with two readout ports and memory-setting indicator.
2. Body: bronze.
3. Size: Same as connected piping, but not larger than NPS 2.
4. Accessories: Meter hoses, fittings, valves, differential pressure meter, and carrying case.

2.5 TEMPERATURE-ACTUATED, WATER MIXING VALVES

A. Primary, Thermostatic, Water Mixing Valves:

1. Standard: ASSE 1017.
2. Pressure Rating: 125 psig minimum unless otherwise indicated.
3. Refer to Plumbing Fixture Schedule on design drawings.

2.6 OUTLET BOXES

A. Icemaker Outlet Boxes:

1. Mounting: Recessed.
2. Material and Finish: Enameled-steel or epoxy-painted-steel box and faceplate.
3. Faucet: Valved fitting complying with ASME A112.18.1. Include NPS 1/2 or smaller copper tube outlet.
4. Supply Shutoff Fitting: NPS 1/2 gate, globe, or ball valve and NPS 1/2 copper, water tubing.

2.7 HOSE BIBBS

A. Hose Bibbs:

1. Standard: ASME A112.18.1 for sediment faucets.
2. Refer to Plumbing Fixture Schedule on design drawings.

2.8 WALL HYDRANTS

A. Non-freeze Wall Hydrants:

1. Refer to Plumbing Fixture Schedule on design drawings.

## 2.9 DRAIN VALVES

### A. Ball-Valve-Type, Hose-End Drain Valves:

1. Standard: MSS SP-110 for standard-port, two-piece ball valves.
2. Pressure Rating: 400-psig minimum CWP.
3. Size: NPS 3/4.
4. Body: Copper alloy.
5. Ball: Chrome-plated brass.
6. Seats and Seals: Replaceable.
7. Handle: Vinyl-covered steel.
8. Inlet: Threaded or solder joint.
9. Outlet: Threaded, short nipple with garden-hose thread complying with ASME B1.20.7 and cap with brass chain.

## 2.10 WATER-HAMMER ARRESTERS

### A. Water-Hammer Arresters:

1. Standard: ASSE 1010 or PDI-WH 201.
2. Type: Metal bellows or Copper tube with piston.
3. Size: ASSE 1010, Sizes AA and A through F, or PDI-WH 201, Sizes A through F.

## 2.11 WATER FILTERS

- ### A. Filter: One or more water filters complying with NSF 42 and NSF 53 for cyst and lead reduction to below EPA standards; with capacity sized for unit peak flow rate.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- #### A. Install backflow preventers in each water supply to mechanical equipment and systems and to other equipment and water systems that may be sources of contamination. Comply with authorities having jurisdiction.
1. Locate backflow preventers in same room as connected equipment or system.
  2. Install drain for backflow preventers with atmospheric-vent drain connection with air-gap fitting, fixed air-gap fitting, or equivalent positive pipe separation of at least two pipe diameters in drain piping and pipe-to-floor drain. Locate air-gap device attached to or under backflow preventer. Simple air breaks are unacceptable for this application.
  3. Do not install bypass piping around backflow preventers.
- #### B. Install balancing valves in locations where they can easily be adjusted.
- #### C. Install temperature-actuated, water mixing valves with check stops or shutoff valves on inlets and with shutoff valve on outlet.

1. Install cabinet-type units recessed in or surface mounted on wall as specified.
- D. Install outlet boxes recessed in wall or surface mounted on wall. Install 2-by-4-inch fire-retardant-treated-wood blocking, wall reinforcement between studs. Comply with requirements for fire-retardant-treated-wood blocking in Section 061000 "Rough Carpentry."
- E. Install water-hammer arresters in water piping according to PDI-WH 201.
- F. Install ball valves with valved bypass on water connections to water filters at ice machine water supply. Comply with valve requirements specified in Section 220523.12 "Ball Valves for Plumbing Piping."

### 3.2 LABELING AND IDENTIFYING

- A. Equipment Nameplates and Signs: Install engraved plastic-laminate equipment nameplate or sign on or near each of the following:
  1. Reduced-pressure-principle backflow preventers.
  2. Calibrated balancing valves.
  3. Primary, thermostatic, water mixing valves.
  4. Outlet boxes.
- B. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit. Nameplates and signs are specified in Section 220553 "Identification for Plumbing Piping and Equipment."

### 3.3 FIELD QUALITY CONTROL

- A. Perform the following tests and inspections:
  1. Test each reduced-pressure-principle backflow preventer according to authorities having jurisdiction and the device's reference standard.
- B. Domestic water piping specialties will be considered defective if they do not pass tests and inspections.
- C. Prepare test and inspection reports.

### 3.4 ADJUSTING

- A. Set field-adjustable flow set points of balancing valves.
- B. Set field-adjustable temperature set points of temperature-actuated, water mixing valves.

END OF SECTION 221119



SECTION 221123 - DOMESTIC WATER PUMPS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
  - 1. In-line, sealless centrifugal pumps.

1.3 DEFINITIONS

- A. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control, signaling power-limited circuits.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include materials of construction, rated capacities, certified performance curves with operating points plotted on curves, operating characteristics, electrical characteristics, and furnished specialties and accessories.

1.5 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For domestic water pumps to include in operation and maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. UL Compliance: Comply with UL 778 for motor-operated water pumps.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Retain shipping flange protective covers and protective coatings during storage.
- B. Protect bearings and couplings against damage.
- C. Comply with pump manufacturer's written rigging instructions for handling.

## PART 2 - PRODUCTS

### 2.1 IN-LINE, SEALLESS CENTRIFUGAL PUMPS

- A. Description: Factory-assembled and -tested, in-line, close-coupled, canned-motor, sealless, overhung-impeller centrifugal pumps.
- B. Refer to Plumbing Fixture Schedule on design drawings for additional information.

### 2.2 MOTORS

- A. Comply with NEMA designation, temperature rating, service factor, enclosure type, and efficiency requirements for motors specified in Section 220513 "Common Motor Requirements for Plumbing Equipment."
  - 1. Motor Sizes: Minimum size as indicated. If not indicated, large enough so driven load will not require motor to operate in service factor range above 1.0.

### 2.3 CONTROLS

- A. Refer to DDC system diagrams for control of hot-water circulation pump.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

- A. Examine roughing-in of domestic-water-piping system to verify actual locations of connections before pump installation.

### 3.2 PUMP INSTALLATION

- A. Comply with HI 1.4.
- B. Install in-line, sealless centrifugal pumps with shaft horizontal unless otherwise indicated.
- C. Install thermostats in hot-water return piping.

### 3.3 CONNECTIONS

- A. Comply with requirements for piping specified in Section 221116 "Domestic Water Piping." Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Install piping adjacent to pumps to allow service and maintenance.
- C. Connect domestic water piping to pumps. Install suction and discharge piping equal to or greater than size of pump nozzles.

### 3.4 IDENTIFICATION

- A. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment" for identification of pumps.

### 3.5 STARTUP SERVICE

- A. Perform startup service.
  - 1. Complete installation and startup checks according to manufacturer's written instructions.
  - 2. Check piping connections for tightness.
  - 3. Clean strainers on suction piping.
  - 4. Perform the following startup checks for each pump before starting:
    - a. Verify bearing lubrication.
    - b. Verify that pump is free to rotate by hand and that pump for handling hot liquid is free to rotate with pump hot and cold. If pump is bound or drags, do not operate until cause of trouble is determined and corrected.
    - c. Verify that pump is rotating in the correct direction.
    - d. Verify that pump is controlled by DDC system.
  - 5. Prime pump by opening suction valves and closing drains, and prepare pump for operation.
  - 6. Start motor.
  - 7. Open discharge valve slowly.
  - 8. Adjust timer settings.

### 3.6 ADJUSTING

- A. Adjust domestic water pumps to function smoothly, and lubricate as recommended by manufacturer.
- B. Adjust initial temperature set points.
- C. Set field-adjustable switches and circuit-breaker trip ranges as indicated.

END OF SECTION 221123

SECTION 221316 - SANITARY WASTE AND VENT PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
  - 1. Pipe, tube, and fittings.
  - 2. Specialty pipe fittings.

1.2 PERFORMANCE REQUIREMENTS

- A. Components and installation shall be capable of withstanding the following minimum working pressure unless otherwise indicated:
  - 1. Soil, Waste, and Vent Piping: 10-foot head of water.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.5 QUALITY ASSURANCE

- A. Piping materials shall bear label, stamp, or other markings of specified testing agency.

1.6 PROJECT CONDITIONS

- A. Interruption of Existing Sanitary Waste Service: Do not interrupt service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary service according to requirements indicated:
  - 1. Notify Owner no fewer than two days in advance of proposed interruption of sanitary waste service.
  - 2. Do not proceed with interruption of sanitary waste service without Owner's written permission.

PART 2 - PRODUCTS

2.1 PIPING MATERIALS

- A. Comply with requirements in "Piping Schedule" Article for applications of pipe, tube, fitting materials, and joining methods for specific services, service locations, and pipe sizes.

2.2 HUB-AND-SPIGOT, CAST-IRON SOIL PIPE AND FITTINGS

- A. Pipe and Fittings: ASTM A 74, Service class.

- B. Gaskets: ASTM C 564, rubber.
- C. Calking Materials: ASTM B 29, pure lead and oakum or hemp fiber.

### 2.3 HUBLESS, CAST-IRON SOIL PIPE AND FITTINGS

- A. Pipe and Fittings: ASTM A 888 or CISPI 301.
- B. CISPI, Hubless-Piping Couplings:
  - 1. Standards: ASTM C 1277 and CISPI 310.
  - 2. Description: Stainless-steel corrugated shield with stainless-steel bands and tightening devices; and ASTM C 564, rubber sleeve with integral, center pipe stop.

### 2.4 PVC PIPE AND FITTINGS

- A. Solid-Wall PVC Pipe: ASTM D 2665, drain, waste, and vent.
- B. PVC Socket Fittings: ASTM D 2665, made to ASTM D 3311, drain, waste, and vent patterns and to fit Schedule 40 pipe.
- C. Adhesive Primer: ASTM F 656.
- D. Solvent Cement: ASTM D 2564.

### 2.5 SPECIALTY PIPE FITTINGS

- A. Transition Couplings:
  - 1. General Requirements: Fitting or device for joining piping with small differences in OD's or of different materials. Include end connections same size as and compatible with pipes to be joined.
  - 2. Fitting-Type Transition Couplings: Manufactured piping coupling or specified piping system fitting.
  - 3. Unshielded, Nonpressure Transition Couplings:
    - a. Standard: ASTM C 1173
    - b. Description: Elastomeric, sleeve-type, reducing or transition pattern. Include shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.
    - c. Sleeve Materials:
      - 1) For Cast-Iron Soil Pipes: ASTM C 564, rubber.
      - 2) For Plastic Pipes: ASTM F 477, elastomeric seal or ASTM D 5926, PVC.
      - 3) For Dissimilar Pipes: ASTM D 5926, PVC or other material compatible with pipe materials being joined.

## PART 3 - EXECUTION

### 3.1 EARTH MOVING

- A. Comply with requirements for excavating, trenching, and backfilling specified in Division 33.

### 3.2 PIPING INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems. Indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations. Install piping as indicated unless deviations to layout are approved on coordination drawings.
- B. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.
- C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- E. Install piping at indicated slopes.
- F. Install piping free of sags and bends.
- G. Install fittings for changes in direction and branch connections.
- H. Install piping to allow application of insulation.
- I. Make changes in direction for soil and waste drainage and vent piping using appropriate branches, bends, and long-sweep bends. Sanitary tees and short-sweep 1/4 bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Use long-turn, double Y-branch and 1/8-bend fittings if two fixtures are installed back to back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow more than 90 degrees. Use proper size of standard increasers and reducers if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.
- J. Lay buried building drainage piping beginning at low point of each system. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements. Maintain swab in piping and pull past each joint as completed.
- K. Install soil and waste drainage and vent piping at the following minimum slopes unless otherwise indicated:
  - 1. Building Sanitary Drain: 2 percent downward in direction of flow for piping NPS 3 and smaller; 1 percent downward in direction of flow for piping NPS 4 and larger.
  - 2. Horizontal Sanitary Drainage Piping: 2 percent downward in direction of flow.
  - 3. Vent Piping: 1 percent down toward vertical fixture vent or toward vent stack.
- L. Install cast-iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings."
- M. Install underground PVC piping according to ASTM D 2321.

N. Plumbing Specialties:

1. Install cleanouts at grade and extend to where building sanitary drains connect to building sanitary sewers in sanitary drainage gravity-flow piping. Comply with requirements for cleanouts specified in Section 221319 "Sanitary Waste Piping Specialties."
2. Install drains in sanitary drainage gravity-flow piping. Comply with requirements for drains specified in Section 221319 "Sanitary Waste Piping Specialties."

O. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.

P. Install sleeves for piping penetrations of walls, ceilings, and floors. Comply with requirements for sleeves specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."

Q. Install sleeve seals for piping penetrations of concrete walls and slabs. Comply with requirements for sleeve seals specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."

R. Install escutcheons for piping penetrations of walls, ceilings, and floors. Comply with requirements for escutcheons specified in Section 220518 "Escutcheons for Plumbing Piping."

3.3 JOINT CONSTRUCTION

A. Join hub-and-spigot, cast-iron soil piping with gasket joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.

B. Join hubless, cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-piping coupling joints.

C. Plastic, Nonpressure-Piping, Solvent-Cement Joints: Clean and dry joining surfaces. Join pipe and fittings according to the following:

1. Comply with ASTM F 402 for safe-handling practice of cleaners, primers, and solvent cements.
2. PVC Piping: Join according to ASTM D 2665 Appendixes.

3.4 SPECIALTY PIPE FITTING INSTALLATION

A. Transition Couplings:

1. Install transition couplings at joints of piping with small differences in OD's.
2. In Drainage Piping: Unshielded, nonpressure transition couplings.

3.5 HANGER AND SUPPORT INSTALLATION

A. Comply with requirements for pipe hanger and support devices and installation specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."

1. Install carbon-steel pipe hangers for horizontal piping in noncorrosive environments.
2. Vertical Piping: MSS Type 8 or Type 42, clamps.
3. Install individual, straight, horizontal piping runs:
  - a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.
  - b. Longer Than 100 Feet: MSS Type 43, adjustable roller hangers.

- c. Longer Than 100 Feet if Indicated: MSS Type 49, spring cushion rolls.
  4. Multiple, Straight, Horizontal Piping Runs 100 Feet or Longer: MSS Type 44, pipe rolls. Support pipe rolls on trapeze.
  5. Base of Vertical Piping: MSS Type 52, spring hangers.
- B. Support horizontal piping and tubing within 12 inches of each fitting and coupling.
  - C. Support vertical piping and tubing at base and at each floor.
  - D. Rod diameter may be reduced one size for double-rod hangers, with 3/8-inch minimum rods.
  - E. Install hangers for cast-iron soil piping with the following maximum horizontal spacing and minimum rod diameters:
    1. NPS 1-1/2 and NPS 2: 60 inches with 3/8-inch rod.
    2. NPS 3: 60 inches with 1/2-inch rod.
    3. NPS 4 and NPS 5: 60 inches with 5/8-inch rod.
  - F. Install supports for vertical cast-iron soil piping every 15 feet.
  - G. Support piping and tubing not listed above according to MSS SP-69 and manufacturer's written instructions.
  - H. Support piping and tubing not listed above according to MSS SP-69 and manufacturer's written instructions.

### 3.6 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Connect soil and waste piping to exterior sanitary sewerage piping. Use transition fitting to join dissimilar piping materials.
- C. Connect drainage and vent piping to the following:
  1. Plumbing Fixtures: Connect drainage piping in sizes indicated, but not smaller than required by plumbing code.
  2. Plumbing Fixtures and Equipment: Connect atmospheric vent piping in sizes indicated, but not smaller than required by authorities having jurisdiction.
  3. Plumbing Specialties: Connect drainage and vent piping in sizes indicated, but not smaller than required by plumbing code.
  4. Install test tees (wall cleanouts) in conductors near floor and floor cleanouts with cover flush with floor.
  5. Comply with requirements for cleanouts and drains specified in Section 221319 "Sanitary Waste Piping Specialties."
  6. Equipment: Connect drainage piping as indicated. Provide shutoff valve if indicated and union for each connection. Use flanges instead of unions for connections NPS 2-1/2 and larger.



### 3.7 IDENTIFICATION

- A. Identify exposed sanitary waste and vent piping. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

### 3.8 FIELD QUALITY CONTROL

- A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.
  - 1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in and before setting fixtures.
  - 2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.
- B. Reinspection: If authorities having jurisdiction find that piping will not pass test or inspection, make required corrections and arrange for reinspection.
- C. Reports: Prepare inspection reports and have them signed by authorities having jurisdiction.
- D. Test sanitary drainage and vent piping according to procedures of authorities having jurisdiction or, in absence of published procedures, as follows:
  - 1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
  - 2. Leave uncovered and unconcealed new, altered, extended, or replaced drainage and vent piping until it has been tested and approved. Expose work that was covered or concealed before it was tested.
  - 3. Roughing-in Plumbing Test Procedure: Test drainage and vent piping except outside leaders on completion of roughing-in. Close openings in piping system and fill with water to point of overflow, but not less than 10-foot head of water. From 15 minutes before inspection starts to completion of inspection, water level must not drop. Inspect joints for leaks.
  - 4. Finished Plumbing Test Procedure: After plumbing fixtures have been set and traps filled with water, test connections and prove they are gastight and watertight. Plug vent-stack openings on roof and building drains where they leave building. Introduce air into piping system equal to pressure of 1-inch wg. Use U-tube or manometer inserted in trap of water closet to measure this pressure. Air pressure must remain constant without introducing additional air throughout period of inspection. Inspect plumbing fixture connections for gas and water leaks.
  - 5. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
  - 6. Prepare reports for tests and required corrective action.

### 3.9 CLEANING AND PROTECTION

- A. Clean interior of piping. Remove dirt and debris as work progresses.
- B. Protect drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.

- C. Place plugs in ends of uncompleted piping at end of day and when work stops.

3.10 PIPING SCHEDULE

- A. Aboveground, soil and waste piping NPS 4 and smaller shall be any of the following:
  - 1. Service class, cast-iron soil pipe and fittings; gaskets; and gasketed joints.
  - 2. Hubless, cast-iron soil pipe and fittings; CISPI hubless-piping couplings; and coupled joints.
- B. Aboveground, vent piping NPS 4 and smaller shall be any of the following:
  - 1. Service class, cast-iron soil pipe and fittings; gaskets; and gasketed joints.
  - 2. Hubless, cast-iron soil pipe and fittings; CISPI hubless-piping couplings; and coupled joints.
- C. Underground/Underslab, soil, waste, and vent piping shall be the following:
  - 1. Solid wall PVC pipe, PVC socket fittings, and solvent-cemented joints.
  - 2. Dissimilar Pipe-Material Couplings: Unshielded, nonpressure transition couplings.

END OF SECTION 221316

SECTION 221319 - SANITARY WASTE PIPING SPECIALTIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Cleanouts.
2. Floor drains.
3. Air-admittance valves.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product

1.3 INFORMATIONAL SUBMITTALS

A. Field quality-control reports.

1.4 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For drainage piping specialties to include in emergency, operation, and maintenance manuals.

1.5 QUALITY ASSURANCE

A. Drainage piping specialties shall bear label, stamp, or other markings of specified testing agency.

PART 2 - PRODUCTS

2.1 CLEANOUTS

A. Exposed Metal Cleanouts:

1. ASME A112.36.2M, Cast-Iron Cleanouts:
2. Standard: ASME A112.36.2M for cast iron for cleanout test tee.
3. Size: Same as connected drainage piping
4. Body Material: Hub-and-spigot, cast-iron soil pipe T-branch as required to match connected piping.
5. Closure: Countersunk or raised-head, cast-iron plug.
6. Closure Plug Size: Same as or not more than one size smaller than cleanout size.

B. Metal Floor Cleanouts:

1. ASME A112.36.2M, Cast-Iron Cleanouts:
2. Standard: ASME A112.36.2M for adjustable housing cast-iron soil pipe with cast-iron ferrule cleanout.

3. Size: Same as connected branch.
4. Body or Ferrule: Cast iron.
5. Clamping Device: Not required.
6. Outlet Connection: Spigot.
7. Closure: Brass plug with straight threads and gasket.
8. Adjustable Housing Material: Cast iron with threads.
9. Frame and Cover Material and Finish: Nickel-bronze, copper alloy.
10. Frame and Cover Shape: Round.
11. Top Loading Classification: Medium Duty.
12. Riser: ASTM A 74, Service class, cast-iron drainage pipe fitting and riser to cleanouts.

C. Cast-Iron Wall Cleanouts:

1. Standard: ASME A112.36.2M. Include wall access.
2. Size: Same as connected drainage piping.
3. Body: Hub-and-spigot, cast-iron soil pipe T-branch as required to match connected piping.
4. Closure: Countersunk or raised-head, brass plug.
5. Closure Plug Size: Same as or not more than one size smaller than cleanout size.
6. Wall Access: Round, flat, chrome-plated brass or stainless-steel cover plate with screw.
7. Wall Access: Round, nickel-bronze, copper-alloy, or stainless-steel wall-installation frame and cover.

2.2 FLOOR DRAINS

- A. Refer to Plumbing Fixture Schedule on design drawings.

2.3 MISCELLANEOUS SANITARY DRAINAGE PIPING SPECIALTIES

A. Air-Gap Fittings:

1. Standard: ASME A112.1.2, for fitting designed to ensure fixed, positive air gap between installed inlet and outlet piping.
2. Body: Bronze or cast iron.
3. Inlet: Opening in top of body.
4. Outlet: Larger than inlet.
5. Size: Same as connected waste piping and with inlet large enough for associated indirect waste piping.

B. Expansion Joints:

1. Standard: ASME A112.21.2M.
2. Body: Cast iron with bronze sleeve, packing, and gland.
3. End Connections: Matching connected piping.
4. Size: Same as connected soil, waste, or vent piping.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install cleanouts in aboveground piping and building drain piping according to the following, unless otherwise indicated:
  - 1. Size same as drainage piping up to NPS 4. Use NPS 4 for larger drainage piping unless larger cleanout is indicated.
  - 2. Locate at each change in direction of piping greater than 45 degrees.
  - 3. Locate at minimum intervals of 50 feet for piping NPS 4 and smaller and 100 feet for larger piping.
  - 4. Locate at base of each vertical soil and waste stack.
- B. For floor cleanouts for piping below floors, install cleanout deck plates with top flush with finished floor.
- C. For cleanouts located in concealed piping, install cleanout wall access covers, of types indicated, with frame and cover flush with finished wall.
- D. Install floor drains at low points of surface areas to be drained. Set grates of drains flush with finished floor, unless otherwise indicated.
  - 1. Position floor drains for easy access and maintenance.
  - 2. Set floor drains below elevation of surrounding finished floor to allow floor drainage. Set with grates depressed according to the following drainage area radii:
    - a. Radius, 30 Inches or Less: Equivalent to 1 percent slope, but not less than 1/4-inch total depression.
    - b. Radius, 30 to 60 Inches: Equivalent to 1 percent slope.
    - c. Radius, 60 Inches or Larger: Equivalent to 1 percent slope, but not greater than 1-inch total depression.
  - 3. Install floor-drain flashing collar or flange so no leakage occurs between drain and adjoining flooring. Maintain integrity of waterproof membranes where penetrated.
  - 4. Install individual traps for floor drains connected to sanitary building drain, unless otherwise indicated.
- E. Install air-gap fittings on draining-type backflow preventers and on indirect-waste piping discharge into sanitary drainage system.
- F. Install expansion joints where piping crosses building expansion joints.
- G. Install wood-blocking reinforcement for wall-mounting-type specialties.
- H. Install traps on plumbing specialty drain outlets. Omit traps on indirect wastes unless trap is indicated.

3.2 CONNECTIONS

- A. Comply with requirements in Section 221316 "Sanitary Waste and Vent Piping" for piping installation requirements. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Install piping adjacent to equipment to allow service and maintenance.

3.3 FIELD QUALITY CONTROL

- A. Perform tests and inspections and prepare test reports.
- B. Tests and Inspections:
  - 1. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
  - 2. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

3.4 PROTECTION

- A. Protect drains during remainder of construction period to avoid clogging with dirt or debris and to prevent damage from traffic or construction work.
- B. Place plugs in ends of uncompleted piping at end of each day or when work stops.

END OF SECTION 221319

SECTION 221323 - SANITARY WASTE INTERCEPTORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
  - 1. Oil interceptors.

1.3 DEFINITIONS

- A. PP: Polypropylene plastic.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of plastic interceptor indicated. Include materials of fabrication, dimensions, rated capacities, retention capacities, operating characteristics, size and location of each pipe connection, furnished specialties, and accessories.
- B. Shop Drawings: For each type and size of precast-concrete interceptor indicated.
  - 1. Include materials of construction, dimensions, rated capacities, retention capacities, location and size of each pipe connection, furnished specialties, and accessories.

1.5 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Interceptors, drawn to scale, on which the following items are shown and coordinated with each other, based on input from Installers of the items involved:
  - 1. Interceptors.
  - 2. Piping connections. Include size, location, and elevation of each.
  - 3. Interface with underground structures and utility services.

1.6 PROJECT CONDITIONS

- A. Interruption of Existing Sewer Services: Do not interrupt services to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary sewer services according to requirements indicated:

1. Notify Construction Manager no fewer than seven days in advance of proposed interruption of service.
2. Do not proceed with interruption of sewer services without Construction Manager's written permission.

## PART 2 - PRODUCTS

- A. Oil Interceptors: Plastic body; with removable sediment bucket or strainer, baffles, vents, and flow-control fitting on inlet.
  1. Inlet, Outlet, Vent, and Waste-Oil Outlet Piping Connections: Hub, hubless, or threaded, unless otherwise indicated.
  2. Cover: Plastic with steel reinforcement to provide ASTM C 890 load.

## PART 3 - EXECUTION

### 3.1 EARTHWORK

- A. Excavating, trenching, and backfilling are specified in Section 312000 "Earth Moving."

### 3.2 INSTALLATION

- A. Set tops of grating frames and grates flush with finished surface.
- B. Set plastic interceptor level and plumb.

### 3.3 CONNECTIONS

- A. Piping installation requirements are specified in Section 221316 "Sanitary Waste and Vent Piping." Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Make piping connections between interceptors and piping systems.

### 3.4 IDENTIFICATION

- A. Identification materials and installation are specified in Section 312000 "Earth Moving." Arrange for installation of green warning tapes directly over piping and at outside edges of underground interceptors.
  1. Use warning tapes or detectable warning tape over ferrous piping.
  2. Use detectable warning tape over nonferrous piping and over edges of underground structures.

END OF SECTION 221323



SECTION 221413 - FACILITY STORM DRAINAGE PIPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
  - 1. Hub-and-spigot, cast-iron soil pipe and fittings.
  - 2. Hubless, cast-iron soil pipe and fittings.
  - 3. Specialty pipe and fittings.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

- A. Field quality-control reports.

1.5 QUALITY ASSURANCE

- A. Piping materials shall bear label, stamp, or other markings of specified testing agency.

1.6 FIELD CONDITIONS

- A. Interruption of Existing Storm Drainage Service: Do not interrupt service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary service according to requirements indicated:
  - 1. Notify Construction Manager no fewer than two days in advance of proposed interruption of storm drainage service.
  - 2. Do not proceed with interruption of storm drainage service without Construction Manager's written permission.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Components and installation shall be capable of withstanding the following minimum working pressure unless otherwise indicated:

1. Storm Drainage Piping: 10-foot head of water.

2.2 HUB-AND-SPIGOT, CAST-IRON SOIL PIPE AND FITTINGS

- A. Pipe and Fittings:

1. Marked with CISPI collective trademark and NSF certification mark.
2. Class: ASTM A 74, Service class.

- B. Gaskets: ASTM C 564, rubber.

- C. Caulking Materials: ASTM B 29, pure lead and oakum or hemp fiber.

2.3 HUBLESS, CAST-IRON SOIL PIPE AND FITTINGS

- A. Pipe and Fittings:

1. Marked with CISPI collective trademark and NSF certification mark.
2. Standard: ASTM A 888 or CISPI 301.

- B. Heavy-Duty, Hubless-Piping Couplings:

1. Standard: ASTM C 1540.
2. Description: Stainless-steel shield with stainless-steel bands and tightening devices; and ASTM C 564, rubber sleeve with integral, center pipe stop.

2.4 SPECIALTY PIPE FITTINGS

- A. Transition Couplings:

1. General Requirements: Fitting or device for joining piping with small differences in ODs or of different materials. Include end connections same size as and compatible with pipes to be joined.
2. Fitting-Type Transition Couplings: Manufactured piping coupling or specified-piping-system fitting.
3. Shielded, Nonpressure Transition Couplings:
  - a. Standard: ASTM C 1460.
  - b. Description: Elastomeric or rubber sleeve with full-length, corrosion-resistant outer shield and corrosion-resistant-metal tension band and tightening mechanism on each end.

- c. End Connections: Same size as and compatible with pipes to be joined.

### PART 3 - EXECUTION

#### 3.1 EARTH MOVING

- A. Comply with requirements for excavating, trenching, and backfilling specified in Section 312000 "Earth Moving."

#### 3.2 PIPING INSTALLATION

- A. Drawing plans, schematics, and diagrams indicate general location and arrangement of piping systems.
  1. Indicated locations and arrangements were used to size pipe and calculate friction loss, expansion, pump sizing, and other design considerations.
  2. Install piping as indicated unless deviations from layout are approved on coordination drawings.
- B. Install piping in concealed locations unless otherwise indicated and except in equipment rooms and service areas.
- C. Install piping indicated to be exposed and piping in equipment rooms and service areas at right angles or parallel to building walls. Diagonal runs are prohibited unless specifically indicated otherwise.
- D. Install piping above accessible ceilings to allow sufficient space for ceiling panel removal.
- E. Install piping to permit valve servicing.
- F. Install piping at indicated slopes.
- G. Install piping free of sags and bends.
- H. Install fittings for changes in direction and branch connections.
- I. Install piping to allow application of insulation.
- J. Make changes in direction for piping using appropriate branches, bends, and long-sweep bends.
  1. Do not change direction of flow more than 90 degrees.
  2. Use proper size of standard increasers and reducers if pipes of different sizes are connected.
    - a. Reducing size of drainage piping in direction of flow is prohibited.
- K. Lay buried building piping beginning at low point of each system.

1. Install true to grades and alignment indicated, with unbroken continuity of invert. Place hub ends of piping upstream.
  2. Install required gaskets according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements.
  3. Maintain swab in piping and pull past each joint as completed.
- L. Install piping at the following minimum slopes unless otherwise indicated:
1. Building Storm Drain: 2 percent downward in direction of flow for piping NPS 3 and smaller; 1 percent downward in direction of flow for piping NPS 4 and larger.
  2. Horizontal Storm Drainage Piping: 2 percent downward in direction of flow.
- M. Install cast-iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings."
- N. Plumbing Specialties:
1. Install cleanouts at grade and extend to where building storm drains connect to building storm sewers in storm drainage gravity-flow piping.
    - a. Install cleanout fitting with closure plug inside the building in storm drainage force-main piping.
    - b. Comply with requirements for cleanouts specified in Section 221423 "Storm Drainage Piping Specialties."
- O. Do not enclose, cover, or put piping into operation until it is inspected and approved by authorities having jurisdiction.
- P. Install sleeves for piping penetrations of walls, ceilings, and floors.
1. Comply with requirements for sleeves specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."
- Q. Install sleeve seals for piping penetrations of concrete walls and slabs.
1. Comply with requirements for sleeve seals specified in Section 220517 "Sleeves and Sleeve Seals for Plumbing Piping."
- R. Install escutcheons for piping penetrations of walls, ceilings, and floors.
1. Comply with requirements for escutcheons specified in Section 220518 "Escutcheons for Plumbing Piping."
- 3.3 JOINT CONSTRUCTION
- A. Hub-and-Spigot, Cast-Iron Soil Piping Gasketed Joints: Join according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.

### 3.4 SPECIALTY PIPE FITTING INSTALLATION

- A. Transition Couplings:
  - 1. Install transition couplings at joints of piping with small differences in ODs.
  - 2. In Drainage Piping: Shielded, nonpressure transition couplings.

### 3.5 HANGER AND SUPPORT INSTALLATION

- A. Comply with requirements for seismic-restraint devices specified in Section 220548 "Vibration and Seismic Controls for Plumbing Piping and Equipment."
- B. Comply with requirements for pipe hanger and support devices and installation specified in Section 220529 "Hangers and Supports for Plumbing Piping and Equipment."
  - 1. Install carbon-steel pipe hangers for horizontal piping in noncorrosive environments.
  - 2. Install carbon-steel pipe support clamps for vertical piping in noncorrosive environments.
  - 3. Vertical Piping: MSS Type 8 or Type 42, clamps.
  - 4. Install individual, straight, horizontal piping runs:
    - a. 100 Feet and Less: MSS Type 1, adjustable, steel clevis hangers.
- C. Support horizontal piping and tubing within 12 inches of each fitting and coupling.
- D. Support vertical piping and tubing at base and at each floor.
- E. Rod diameter may be reduced one size for double-rod hangers, with 3/8-inch minimum rods.
- F. Install hangers for cast-iron soil piping with the following maximum horizontal spacing and minimum rod diameters:
  - 1. NPS 4 and NPS 5: 60 inches with 5/8-inch rod.
  - 2. NPS 6 and NPS 8: 60 inches with 3/4-inch rod.
  - 3. Spacing for 10-foot pipe lengths may be increased to 10 feet. Spacing for fittings is limited to 60 inches.
- G. Install supports for vertical cast-iron soil piping every 15 feet.
- H. Support piping and tubing not listed above according to MSS SP-58 and manufacturer's written instructions.

### 3.6 CONNECTIONS

- A. Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Connect interior storm drainage piping to exterior storm drainage piping. Use transition fitting to join dissimilar piping materials.
- C. Connect storm drainage piping to roof drains and storm drainage specialties.

1. Install test tees (wall cleanouts) in conductors near floor, and floor cleanouts with cover flush with floor.

D. Where installing piping adjacent to equipment, allow space for service and maintenance.

### 3.7 IDENTIFICATION

A. Identify exposed storm drainage piping.

B. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

### 3.8 FIELD QUALITY CONTROL

A. During installation, notify authorities having jurisdiction at least 24 hours before inspection must be made. Perform tests specified below in presence of authorities having jurisdiction.

1. Roughing-in Inspection: Arrange for inspection of piping before concealing or closing-in after roughing-in.
2. Final Inspection: Arrange for final inspection by authorities having jurisdiction to observe tests specified below and to ensure compliance with requirements.

B. Test storm drainage piping according to procedures of authorities having jurisdiction or, in absence of published procedures, as follows:

1. Test for leaks and defects in new piping and parts of existing piping that have been altered, extended, or repaired.
  - a. If testing is performed in segments, submit separate report for each test, complete with diagram of portion of piping tested.
2. Leave uncovered and unconcealed new, altered, extended, or replaced storm drainage piping until it has been tested and approved.
  - a. Expose work that was covered or concealed before it was tested.
3. Test Procedure:
  - a. Test storm drainage piping on completion of roughing-in.
  - b. Close openings in piping system and fill with water to point of overflow, but not less than 10-foot head of water. From 15 minutes before inspection starts until completion of inspection, water level must not drop. Inspect joints for leaks.
4. Repair leaks and defects with new materials and retest piping, or portion thereof, until satisfactory results are obtained.
5. Prepare reports for tests and required corrective action.

C. Piping will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports.

3.9 CLEANING AND PROTECTION

- A. Clean interior of piping. Remove dirt and debris as work progresses.
- B. Protect drains during remainder of construction period to avoid clogging with dirt and debris and to prevent damage from traffic and construction work.
- C. Place plugs in ends of uncompleted piping at end of day and when work stops.

3.10 PIPING SCHEDULE

- A. Flanges and unions may be used on aboveground pressure piping unless otherwise indicated.
- B. Aboveground storm drainage piping NPS 6 shall be any of the following:
  - 1. Service class, cast-iron soil pipe and fittings; gaskets; and gasketed joints.
  - 2. Hubless, cast-iron soil pipe and fittings; heavy-duty, hubless-piping couplings; and coupled joints.
- C. Underground storm drainage piping NPS 6 shall be the following:
  - 1. Service class, cast-iron soil pipe and fittings; gaskets; and gasketed joints.

END OF SECTION 221413

SECTION 221423 - STORM DRAINAGE PIPING SPECIALTIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
  - 1. Cleanouts.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.4 QUALITY ASSURANCE

- A. Drainage piping specialties shall bear label, stamp, or other markings of specified testing agency.

PART 2 - PRODUCTS

2.1 CLEANOUTS

- A. Cast-Iron Exposed Cleanouts:
  - 1. Standard: ASME A112.36.2M.
  - 2. Size: Same as connected branch.
  - 3. Body Material: Hub-and-spigot, cast-iron soil pipe T-branch as required to match connected piping.
  - 4. Closure: Countersunk or raised-head, brass plug.
  - 5. Closure Plug Size: Same as, or not more than, one size smaller than cleanout size.
- B. Cast-Iron Exposed Floor Cleanouts:
  - 1. Standard: ASME A112.36.2M.
  - 2. Size: Same as connected branch.
  - 3. Type: Heavy-duty, adjustable housing.
  - 4. Body or Ferrule: Cast iron.
  - 5. Clamping Device: Not required.



6. Outlet Connection: Threaded.
7. Closure: Brass plug with straight threads and gasket.
8. Adjustable Housing Material: Cast iron with setscrews or other device.
9. Frame and Cover Material and Finish: Nickel-bronze, copper alloy.
10. Frame and Cover Shape: Round.
11. Top Loading Classification: Medium Duty.
12. Riser: ASTM A74, Service class, cast-iron drainage pipe fitting and riser to cleanout.

C. Cast-Iron Wall Cleanouts <Insert drawing designation, if any>:

1. Standard: ASME A112.36.2M. Include wall access.
2. Size: Same as connected drainage piping.
3. Body: Hub-and-spigot, cast-iron soil pipe T-branch as required to match connected piping.
4. Closure Plug:
  - a. Brass.
  - b. Countersunk or raised head.
  - c. Drilled and threaded for cover attachment screw.
  - d. Size: Same as, or not more than, one size smaller than cleanout size.

### PART 3 - EXECUTION

#### 3.1 INSTALLATION

- A. Install cleanouts in aboveground piping and building drain piping in accordance with the following instructions unless otherwise indicated:
  1. Use cleanouts the same size as drainage piping up to NPS 4. Use NPS 4 for larger drainage piping unless larger cleanout is indicated.
  2. Locate cleanouts at each change in direction of piping greater than 45 degrees.
  3. Locate cleanouts at minimum intervals of 50 feet for piping NPS 4 and smaller and 100 feet for larger piping.
  4. Locate cleanouts at base of each vertical storm piping conductor.
- B. For floor cleanouts for piping below floors, install cleanout deck plates with top flush with finished floor.
- C. For cleanouts located in concealed piping, install cleanout wall access covers, of types indicated, with frame and cover flush with finished wall.
- D. Install test tees in vertical conductors and near floor.
- E. Install wall cleanouts in vertical conductors. Install access door in wall if indicated.

3.2 CONNECTIONS

- A. Comply with requirements for piping specified in Section 221413 "Facility Storm Drainage Piping." Drawings indicate general arrangement of piping, fittings, and specialties.

END OF SECTION 221423

SECTION 223300 - ELECTRIC, DOMESTIC-WATER HEATERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
  - 1. Commercial, electric, storage, domestic-water heaters.
  - 2. Domestic-water heater accessories.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type and size of domestic-water heater indicated.

1.3 INFORMATIONAL SUBMITTALS

- A. Domestic-Water Heater Labeling: Certified and labeled by testing agency acceptable to authorities having jurisdiction.
- B. Source quality-control reports.
- C. Field quality-control reports.
- D. Warranty: Sample of special warranty.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and maintenance data.

1.5 QUALITY ASSURANCE

- A. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.
- B. ASHRAE/IESNA Compliance: Applicable requirements in ASHRAE/IESNA 90.1.
- C. ASME Compliance: Where ASME-code construction is indicated, fabricate and label commercial, domestic-water heater storage tanks to comply with ASME Boiler and Pressure Vessel Code: Section VIII, Division 1.
- D. NSF Compliance: Fabricate and label equipment components that will be in contact with potable water to comply with NSF 61, "Drinking Water System Components - Health Effects."

1.6 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of electric, domestic-water heaters that fail in materials or workmanship within specified warranty period.
  - 1. Warranty Periods: From date of Substantial Completion.

- a. Commercial, Electric, Storage, Domestic-Water Heaters:
  - 1) Storage Tank: Five years.
  - 2) Controls and Other Components: Three years.

## PART 2 - PRODUCTS

### 2.1 COMMERCIAL, ELECTRIC, DOMESTIC-WATER HEATERS

- A. Commercial, Electric, Storage, Domestic-Water Heaters:
  - 1. Refer to Plumbing Fixture Schedule on design drawings.

### 2.2 DOMESTIC-WATER HEATER ACCESSORIES

- A. Domestic-Water Compression Tanks:
  - 1. Refer to Plumbing Fixture Schedule on design drawings.
- B. Piping-Type Heat Traps: Field-fabricated piping arrangement according to ASHRAE/IESNA 90.1.
- C. Heat-Trap Fittings: ASHRAE 90.2.
- D. Combination Temperature-and-Pressure Relief Valves: ASME rated and stamped. Include relieving capacity at least as great as heat input, and include pressure setting less than domestic-water heater working-pressure rating. Select relief valves with sensing element that extends into storage tank.
- E. Pressure Relief Valves: ASME rated and stamped. Include pressure setting less than domestic-water heater working-pressure rating.
- F. Vacuum Relief Valves: ANSI Z21.22/CSA 4.4.
- G. Shock Absorbers: ASSE 1010 or PDI-WH 201, Size A water hammer arrester.

### 2.3 SOURCE QUALITY CONTROL

- A. Factory Tests: Test and inspect domestic-water heaters specified to be ASME-code construction, according to ASME Boiler and Pressure Vessel Code.
- B. Hydrostatically test commercial domestic-water heaters to minimum of one and one-half times pressure rating before shipment.
- C. Electric, domestic-water heaters will be considered defective if they do not pass tests and inspections. Comply with requirements in Section 014000 "Quality Requirements" for retesting and reinspecting requirements and Section 017300 "Execution" for requirements for correcting the Work.
- D. Prepare test and inspection reports.

### PART 3 - EXECUTION

#### 3.1 DOMESTIC-WATER HEATER INSTALLATION

- A. Commercial, Electric, Domestic-Water Heater Mounting: Install commercial, electric, domestic-water heaters on concrete base.
  - 1. Exception: Omit concrete bases for commercial, electric, domestic-water heaters if installation on stand, bracket, suspended platform.
  - 2. Maintain manufacturer's recommended clearances.
  - 3. Arrange units so controls and devices that require servicing are accessible.
  - 4. Place and secure anchorage devices. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
  - 5. Install anchor bolts to elevations required for proper attachment to supported equipment.
  - 6. Anchor domestic-water heaters to substrate.
- B. Install electric, domestic-water heaters level and plumb, according to layout drawings, original design, and referenced standards. Maintain manufacturer's recommended clearances. Arrange units so controls and devices needing service are accessible.
  - 1. Install shutoff valves on domestic-water-supply piping to domestic-water heaters and on domestic-hot-water outlet piping. Comply with requirements for shutoff valves specified in Section 220523.12 "Ball Valves for Plumbing Piping."
- C. Install combination temperature-and-pressure relief valves in top portion of storage tanks. Use relief valves with sensing elements that extend into tanks. Extend commercial-water-heater relief-valve outlet, with drain piping same as domestic-water piping in continuous downward pitch, and discharge by positive air gap onto closest floor drain.
- D. Install water-heater drain piping as indirect waste to spill by positive air gap into open drains or over floor drains. Install hose-end drain valves at low points in water piping for electric, domestic-water heaters that do not have tank drains. Comply with requirements for hose-end drain valves specified in Section 221119 "Domestic Water Piping Specialties."
- E. Install thermometers on outlet piping of electric, domestic-water heaters. Comply with requirements for thermometers specified in Section 220519 "Meters and Gages for Plumbing Piping."
- F. Install piping-type heat traps on inlet and outlet piping of electric, domestic-water heater storage tanks without integral or fitting-type heat traps.
- G. Fill electric, domestic-water heaters with water.
- H. Charge domestic-water compression tanks with air.

#### 3.2 CONNECTIONS

- A. Comply with requirements for piping specified in Section 221116 "Domestic Water Piping." Drawings indicate general arrangement of piping, fittings, and specialties.
- B. Where installing piping adjacent to electric, domestic-water heaters, allow space for service and maintenance of water heaters. Arrange piping for easy removal of domestic-water heaters.

3.3 IDENTIFICATION

- A. Identify system components. Comply with requirements for identification specified in Section 220553 "Identification for Plumbing Piping and Equipment."

3.4 FIELD QUALITY CONTROL

- A. Perform tests and inspections.
  - 1. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect components, assemblies, and equipment installations, including connections, and to assist in testing.
  - 2. Leak Test: After installation, charge system and test for leaks. Repair leaks and retest until no leaks exist.
  - 3. Operational Test: After electrical circuitry has been energized, start units to confirm proper operation.
  - 4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
- B. Electric, domestic-water heaters will be considered defective if they do not pass tests and inspections. Comply with requirements in Section 014000 "Quality Requirements" for retesting and reinspecting requirements and Section 017300 "Execution" for requirements for correcting the Work.
- C. Prepare test and inspection reports.

END OF SECTION 223300

SECTION 224213.13 - COMMERCIAL WATER CLOSETS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Water closets.
2. Flushometer valves.
3. Toilet seats.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For flushometer valves to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 WATER CLOSETS, FLUSHOMETER VALVES, TOILET SEATS

A. Refer to Plumbing Fixture Schedule on design drawings.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Water-Closet Installation:

1. Install level and plumb according to roughing-in drawings.
2. Install floor-mounted water closets to piping or building substrate.

B. Flushometer-Valve Installation:

1. Install flushometer-valve, water-supply fitting on each supply to each water closet.
2. Attach supply piping to supports or substrate within pipe spaces behind fixtures.
3. Install lever-handle flushometer valves for accessible water closets with handle mounted on open side of water closet.
4. Install actuators in locations that are easy for people with disabilities to reach.

C. Install toilet seats on water closets.

D. Joint Sealing:

1. Seal joints between water closets and floors using sanitary-type, one-part, mildew-resistant silicone sealant.
2. Match sealant color to water-closet color.

### 3.2 CONNECTIONS

- A. Connect water closets with water supplies and soil, waste, and vent piping. Use size fittings required to match water closets.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."
- D. Where installing piping adjacent to water closets, allow space for service and maintenance.

### 3.3 ADJUSTING

- A. Operate and adjust water closets and controls. Replace damaged and malfunctioning water closets, fittings, and controls.
- B. Adjust water pressure at flushometer valves to produce proper flow.

### 3.4 CLEANING AND PROTECTION

- A. Clean water closets and fittings with manufacturers' recommended cleaning methods and materials.
- B. Install protective covering for installed water closets and fittings.
- C. Do not allow use of water closets for temporary facilities unless approved in writing by Owner.

END OF SECTION 224213.13



SECTION 224213.16 - COMMERCIAL URINALS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Urinals.
2. Flushometer valves.

1.2 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.3 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For flushometer valves to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 WALL-HUNG URINALS, FLUSHOMETER VALVES

A. Refer to Plumbing Fixture Schedule on design drawings.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before urinal installation.
- B. Examine walls and floors for suitable conditions where urinals will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Urinal Installation:

1. Install urinals level and plumb according to roughing-in drawings.
2. Install wall-hung, back-outlet urinals onto waste fitting seals and attached to supports.
3. Install accessible, wall-mounted urinals at mounting height for the handicapped/elderly, according to ICC/ANSI A117.1.

B. Support Installation:

1. Install supports, affixed to building substrate, for wall-hung urinals.
2. Use off-floor carriers with waste fitting and seal for back-outlet urinals.
3. Use carriers without waste fitting for urinals with tubular waste piping.
4. Use chair-type carrier supports with rectangular steel uprights for accessible urinals.

C. Flushometer-Valve Installation:

1. Install flushometer-valve water-supply fitting on each supply to each urinal.
2. Attach supply piping to supports or substrate within pipe spaces behind fixtures.
3. Install lever-handle flushometer valves for accessible urinals with handle mounted on open side of compartment.

D. Wall Flange and Escutcheon Installation:

1. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations.
2. Install deep-pattern escutcheons if required to conceal protruding fittings.

E. Joint Sealing:

1. Seal joints between urinals and walls and floors using sanitary-type, one-part, mildew-resistant silicone sealant.
2. Match sealant color to urinal color.

### 3.3 CONNECTIONS

- A. Connect urinals with water supplies and soil, waste, and vent piping. Use size fittings required to match urinals.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."
- D. Where installing piping adjacent to urinals, allow space for service and maintenance.

### 3.4 ADJUSTING

- A. Operate and adjust urinals and controls. Replace damaged and malfunctioning urinals, fittings, and controls. Adjust water pressure at flushometer valves to produce proper flow.

### 3.5 CLEANING AND PROTECTION

- A. Clean urinals and fittings with manufacturers' recommended cleaning methods and materials.
- B. Install protective covering for installed urinals and fittings.
- C. Do not allow use of urinals for temporary facilities unless approved in writing by Owner.

END OF SECTION 224213.16

SECTION 224216.13 - COMMERCIAL LAVATORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Lavatories.
2. Faucets.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Counter cutout templates for mounting of counter-mounted lavatories.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and Maintenance Data: For lavatories and faucets to include in operation and maintenance manuals.

1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:
  - a. Servicing and adjustments of automatic faucets.

PART 2 - PRODUCTS

2.1 LAVATORIES, FAUCETS

- A. Refer to Plumbing Fixture Schedule on design drawings.

2.2 SUPPLY FITTINGS

- A. NSF Standard: Comply with NSF/ANSI 61, "Drinking Water System Components - Health Effects," for supply-fitting materials that will be in contact with potable water.
- B. Standard: ASME A112.18.1/CSA B125.1.
- C. Supply Piping: Chrome-plated-brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated-brass or stainless-steel wall flange.
- D. Supply Stops: Chrome-plated-brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.
- E. Operation: Wheel handle.

F. Risers:

1. NPS 3/8.
2. ASME A112.18.6, braided- or corrugated-stainless-steel, flexible hose riser.

2.3 WASTE FITTINGS

- A. Standard: ASME A112.18.2/CSA B125.2.
- B. Trap:
  1. Size: NPS 1-1/2 by NPS 1-1/4.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before lavatory installation.
- B. Examine counters and walls for suitable conditions where lavatories will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Install lavatories level and plumb according to roughing-in drawings.
- B. Install supports, affixed to building substrate, for wall-mounted lavatories.
- C. Install accessible wall-mounted lavatories at handicapped/elderly mounting height for people with disabilities or the elderly, according to ICC/ANSI A117.1.
- D. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings.
- E. Seal joints between lavatories, counters and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color.
- F. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible lavatories.

3.3 CONNECTIONS

- A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

3.4 ADJUSTING

- A. Operate and adjust lavatories and controls. Replace damaged and malfunctioning lavatories, fittings, and controls.
- B. Adjust water pressure at faucets to produce proper flow.

3.5 CLEANING AND PROTECTION

- A. After completing installation of lavatories, inspect and repair damaged finishes.
- B. Clean lavatories, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.
- C. Provide protective covering for installed lavatories and fittings.
- D. Do not allow use of lavatories for temporary facilities unless approved in writing by Owner.

END OF SECTION 224216.13

SECTION 224216.16 - COMMERCIAL SINKS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
  - 1. Sinks.
  - 2. Sink faucets.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.3 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Counter cutout templates for mounting of counter-mounted lavatories.

1.4 CLOSEOUT SUBMITTALS

- A. Maintenance data.

PART 2 - PRODUCTS

2.1 SINKS, SINK FAUCETS

- A. Refer to Plumbing Fixture Schedule on design drawings.
- B. NSF Standard: Comply with NSF/ANSI 61, "Drinking Water System Components - Health Effects," for faucet-spout materials that will be in contact with potable water.

2.2 SUPPLY FITTINGS

- A. NSF Standard: Comply with NSF/ANSI 61, "Drinking Water System Components - Health Effects," for supply-fitting materials that will be in contact with potable water.
- B. Standard: ASME A112.18.1/CSA B125.1.
- C. Supply Piping: Chrome-plated brass pipe or chrome-plated copper tube matching water-supply piping size. Include chrome-plated brass or stainless-steel wall flange.
- D. Supply Stops: Chrome-plated brass, one-quarter-turn, ball-type or compression valve with inlet connection matching supply piping.
- E. Operation: Loose key.
- F. Risers:
  - 1. NPS 3/8

### PART 3 - EXECUTION

#### 3.1 EXAMINATION

- A. Examine roughing-in of water supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before sink installation.
- B. Examine walls, floors, and counters for suitable conditions where sinks will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

#### 3.2 INSTALLATION

- A. Install sinks level and plumb according to roughing-in drawings.
- B. Install supports, affixed to building substrate, for wall-hung sinks.
- C. Install accessible wall-mounted sinks at handicapped/elderly mounting height according to ICC/ANSI A117.1.
- D. Set floor-mounted sinks in leveling bed of cement grout.
- E. Install water-supply piping with stop on each supply to each sink faucet.
  - 1. Exception: Use ball, gate, or globe valves if supply stops are not specified with sink. Comply with valve requirements specified in Section 220523.12 "Ball Valves for Plumbing Piping."
  - 2. Install stops in locations where they can be easily reached for operation.
- F. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons if required to conceal protruding fittings.
- G. Seal joints between sinks and counters, floors, and walls using sanitary-type, one-part, mildew-resistant silicone sealant. Match sealant color to fixture color.
- H. Install protective shielding pipe covers and enclosures on exposed supplies and waste piping of accessible sinks. Comply with requirements in Section 220719 "Plumbing Piping Insulation."

#### 3.3 CONNECTIONS

- A. Connect sinks with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

#### 3.4 ADJUSTING

- A. Operate and adjust sinks and controls. Replace damaged and malfunctioning sinks, fittings, and controls.

- B. Adjust water pressure at faucets to produce proper flow.

3.5 CLEANING AND PROTECTION

- A. After completing installation of sinks, inspect and repair damaged finishes.
- B. Clean sinks, faucets, and other fittings with manufacturers' recommended cleaning methods and materials.
- C. Provide protective covering for installed sinks and fittings.
- D. Do not allow use of sinks for temporary facilities unless approved in writing by Owner.

END OF SECTION 224216.16



SECTION 224716 - PRESSURE WATER COOLERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes pressure water coolers and related components.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of pressure water cooler.
- B. Shop Drawings: Include diagrams for power, signal, and control wiring.

1.3 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For pressure water coolers to include in maintenance manuals.

1.4 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
  - 1. Filter Cartridges: Equal to 100 percent of quantity installed for each type and size indicated.

PART 2 - PRODUCTS

2.1 PRESSURE WATER COOLERS

- A. Refer to Plumbing Fixture Schedule on design drawings.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine roughing-in for water-supply and sanitary drainage and vent piping systems to verify actual locations of piping connections before fixture installation.
- B. Examine walls and floors for suitable conditions where fixtures will be installed.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Install fixtures level and plumb according to roughing-in drawings. For fixtures indicated for children, install at height required by authorities having jurisdiction.

- B. Set freestanding pressure water coolers on floor.
- C. Install off-the-floor carrier supports, affixed to building substrate, for wall-mounted fixtures.
- D. Install water-supply piping with shutoff valve on supply to each fixture to be connected to domestic-water distribution piping. Use ball, gate, or globe valve. Install valves in locations where they can be easily reached for operation. Valves are specified in Section 220523.12 "Ball Valves for Plumbing Piping."
- E. Install trap and waste piping on drain outlet of each fixture to be connected to sanitary drainage system.
- F. Install wall flanges or escutcheons at piping wall penetrations in exposed, finished locations. Use deep-pattern escutcheons where required to conceal protruding fittings.
- G. Seal joints between fixtures and walls using sanitary-type, one-part, mildew-resistant, silicone sealant. Match sealant color to fixture color.

### 3.3 CONNECTIONS

- A. Connect fixtures with water supplies, stops, and risers, and with traps, soil, waste, and vent piping. Use size fittings required to match fixtures.
- B. Comply with water piping requirements specified in Section 221116 "Domestic Water Piping."
- C. Install ball, gate, or globe shutoff valve on water supply to each fixture. Comply with valve requirements specified in Section 220523.12 "Ball Valves for Plumbing Piping."
- D. Comply with soil and waste piping requirements specified in Section 221316 "Sanitary Waste and Vent Piping."

### 3.4 ADJUSTING

- A. Adjust fixture flow regulators for proper flow and stream height.
- B. Adjust pressure water-cooler temperature settings.

### 3.5 CLEANING

- A. After installing fixture, inspect unit. Remove paint splatters and other spots, dirt, and debris. Repair damaged finish to match original finish.
- B. Clean fixtures, on completion of installation, according to manufacturer's written instructions.
- C. Provide protective covering for installed fixtures.
- D. Do not allow use of fixtures for temporary facilities unless approved in writing by Owner.

END OF SECTION 224716